(51) International Patent Classification 6 :		(11) International Publication Number:	**WO 97/17789**
H04L 27/04, H04B 15/00	**A1**	(43) International Publication Date:	15 May 1997 (15.05.97)

(54) Title: SYSTEM AND METHOD FOR MULTIPLEXING A SPREAD SPECTRUM COMMUNICATION SYSTEM
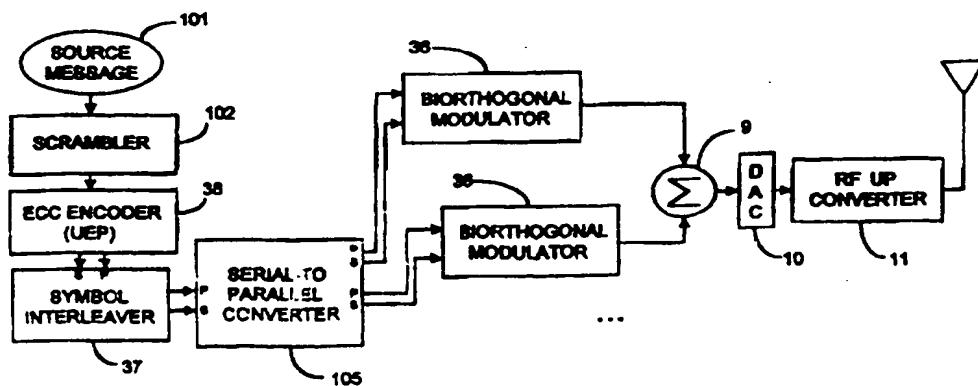
(57) Abstract

A method and system are provided for the synchronous transmission and reception of multiplexed digital signals such as spread spectrum. The system uses biorthogonal modulation (36) of a plurality of orthogonal signals, preferably wideband, together with simultaneous orthogonal multiplexing. The method is found to significantly mitigate the cross-correlation interference that is caused by the interaction between the multiplexed signals. The system transmits a lesser number of multiplexed orthogonal signals than would be required in the corresponding antipodal system, thereby reducing the cross-correlation interference, while maintaining the same information throughput. The bit error rate of the system is reduced. The method combines aspects of unequal error protection (UEP) error correction coding (ECC) (38) with a receiver architecture for biorthogonal signals.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgystan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic	SD	Sudan
CF	Central African Republic		of Korea	SE	Sweden
CG	Congo	KR	Republic of Korea	SG	Singapore
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LR	Liberia	SZ	Swaziland
CS	Czechoslovakia	LT	Lithuania	TD	Chad
CZ	Czech Republic	LU	Luxembourg	TG	Togo
DE	Germany	LV	Latvia	TJ	Tajikistan
DK	Denmark	MC	Monaco	TT	Trinidad and Tobago
EE	Estonia	MD	Republic of Moldova	UA	Ukraine
ES	Spain	MG	Madagascar	UG	Uganda
FI	Finland	ML	Mali	US	United States of America
FR	France	MN	Mongolia	UZ	Uzbekistan
GA	Gabon	MR	Mauritania	VN	Viet Nam

SYSTEM AND METHOD FOR
MULTIPLEXING A SPREAD
<u>SPECTRUM COMMUNICATION SYSTEM</u>

This invention relates to a method and system for

5   reducing the crosscorrelation interference caused by multipath

propagation in a communication system with orthogonal digital

signals. More particularly, this invention relates to a

method and system which utilizes multiplexing of distinct and

orthogonal digital signals which are determined by

10   biorthogonal modulation, and unequal error protection to

reduce interference caused by multipath propagation in a

communication system (e.g. spread spectrum) to improve the

decoded error rate compared to antipodal modulation.

According to certain embodiments, simultaneous multiplexing of

15   a plurality of distinct and orthogonal signals is provided.

<u>BACKGROUND OF THE INVENTION</u>

Robust mobile digital communication is difficult to

accomplish in view of the deleterious effects of the

environment on the propagation characteristics of radio-

20   frequency (RF) channels, for example. Atmospheric conditions

and variations in terrain, foliage, and the distribution and

density of man-made structures strongly affect the medium

which such signals (e.g. RF) traverse. In satellite broadcast

systems, the received propagation path is primarily line-of-

25   sight, and adequate reception may be limited by the presence

of background noise when the available field strength is

insufficient. However, in terrestrial communication, for

carrier frequencies less than about 8 gigahertz (GHz),

multipath interference often causes system degradation or

5   failure before the effects of simple additive noise become

evident.

Multipath interference is caused by the simultaneous

reception of multiple signal paths with varying delays,

amplitudes, and phases. The paths correspond to diffuse and

10   specular reflections of the transmitted signal, typically from

objects situated between the transmitter and the receiver.

The plurality of received signals, due to the different paths,

sum together and cause constructive or destructive linear

interference. The distortion resulting from multipath varies

15   with changes in the position of the transmitter, receiver, and

intervening objects.

Multipath is a frequency-selective phenomenon. The

changes in the received signal amplitude, phase, and delay

vary with frequency, which causes dispersion in the received

20   signal. The rate of change of multipath distortion is in part

determined by the relative difference in velocity between the

transmitter and receiver. The composite multipath signal is

usually comprised of the line-of-sight (LOS) signal component

with minimum path delay and a plurality of echo signal

2

components, with longer delays. However, in obstructed

terrain, the LOS signal can be significantly attenuated or

absent altogether. Although the number of possible signal

propagation paths is innumerable except in the simplest

5   terrain, only those paths whose received signal amplitudes are

significant need to be considered in a digital communication

systems (e.g. those paths within about 15 decibels of the

largest amplitude path).

The delay spread is the approximate duration between the

10   paths of significant amplitude with the minimum and maximum

time-of-arrival at the receiver. A predetermined amount of

bit information is transmitted in a specified interval of time

by the transmitter system. This interval is known as the baud

interval, and the RF signal transmitted is known as the

15   symbol. Unless specific countermeasures are incorporated to

combat multipath, the symbol rate throughput is bounded by

approximately the reciprocal of the delay spread. The delay

spread can exceed, for example, tens of microseconds in very

high frequency (VHF) RF propagation in the circumstance of

20   specular multipath, which restricts the symbol throughput to

less than about 100 kHz.

In terrestrial broadcast systems, the transmitter site is

fixed and a signal is transmitted to a plurality of receivers

through atmospheric free-space. One known way in which to

combat multipath is to use a directional antenna for fixed

receivers, but this may be impractical in mobile environments

which require omnidirectional reception.

Known diversity antenna systems use a plurality of

5   antennas separated by a distance approximately equal to half

of the carrier frequency wavelength. Diversity systems reduce

the problem of insufficient field strength due to the

destructive interference caused by multipath propagation.

However, diversity systems typically do not compensate for

10   dispersive effects. Furthermore, diversity antennas may be

impractical in personal communication systems because of size

requirements.

The effects of multipath propagation can also be

mitigated by the design of a signal set and modulation.

15   Orthogonal Frequency Division Multiplexing (OFDM) and spread

spectrum are two methods that are currently used in

environments where multipath is a problem. Both methods

require that the communication system utilize the full

available bandwidth for maximum effectiveness.

20   In free-space atmospheric propagation of high-power RF

signals, for example, bandwidth restrictions are typically

imposed by regulatory agencies such as the Federal

Communications Commission (FCC) in the United States. The

method of OFDM [reference: W.Y. Zou and Y. Wu, "COFDM: an

overview," *IEEE Transactions on Broadcasting*, Vol. 41, No. 1,

pp. 1-8, March 1995] uses a plurality of synchronized

sinusoid-like narrowband signals, which together span the

available bandwidth and are simultaneously transmitted. Each

5   narrowband signal conveys a fraction of the total data (bit)

rate throughput. The use of multiple narrowband signals

permits the duration of a single information signal (i.e.

symbol or baud) to be made long in duration compared to the

expected delay spread, which minimizes the effects of

10   intersymbol interference, because the simultaneous

multiplexing decreases the required bit rate for each of the

individual narrowband signals. In OFDM, each of the

narrowband signals has the property of being orthogonal to all

of the other multiplexed narrowband signals when properly

15   synchronized. In principle, a sufficient number of the

narrowband signals will be minimally affected because of the

frequency-selective characteristics of multipath so that, with

known error correction coding (ECC), the overall bit rate

throughput is still reliable. However, multipath may still

20   cause destructive interference to some of the narrowband

signals in OFDM modulation so that they may not be received

reliably.

Orthogonal signals in OFDM may be simultaneously

transmitted and uniquely separated from each other in the

receiver by the mathematical process of "correlation." The
extent to which two signals are orthogonal is determined by
the magnitude of their "crosscorrelation" function. The
crosscorrelation value or sum is proportional to the summation

5   of the multiplicative product of the two signals. Signals
which are perfectly orthogonal have a crosscorrelation value
of zero.

A fundamentally different method which combats the
effects of multipath propagation is known as "spread spectrum"

10   modulation [reference: R.L. Pickholtz, D.L. Schilling, and
L.B. Milstein, "Theory of spread-spectrum communications - a
tutorial, *IEEE Transactions on Communications*, Vol. 30, No. 5,
pp. 855-884, May 1982]. See also U.S. Patent Nos. 5,063,560;
5,081,643; 5,235,614; and 5,081,645.

15   In a spread spectrum communication system, the bandwidth
occupied by the digital data message is expanded (spread) by
multiplying the data message by a spreading signal or
sequence. Since multipath is a frequency-selective
phenomenon, if the bandwidth spreading is sufficiently large,

20   only part of the spread signal will be deleteriously affected.
The spreading process is reversed in the receiver in order to
recover the original data message. The improvement in
robustness brought about by such spreading is measured by the
"processing gain" of the spread spectrum system, which is

essentially the ratio of the spread signal bandwidth to that

of the original data message. The processing gain is realized

by the de-spreading process in the receiver. As the bandwidth

of the spread message is collapsed by the process of

5   correlation, the effects of multipath distortion are also

mitigated.

Whereas the principle of OFDM modulation is to transmit

many simultaneous narrowband signals so that only a small

number of the signals are disturbed by multipath, the idea of

10   spread spectrum is to disperse a single signal across the

widest available bandwidth to minimize the fraction of the

total signal energy which is susceptible to multipath. Spread

spectrum modulation may also effective against many forms of

frequency-selective interference other than multipath,

15   including narrowband continuous-wave (CW) interference.

Unfortunately, a disadvantage of spread spectrum

modulation is that if the available bandwidth is limited as in

RF, the bit rate frequency (i.e. reciprocal of bit interval)

of the data message must be a small fraction of the available

20   bandwidth (e.g. less than about 1/10) in order to ensure

sufficient processing gain. Thus, a spread spectrum

communication system with only one spreading signal exhibits

relatively poor spectrum efficiency (e.g. less than about one

(1) bit/symbol/Hz).

7

In order to improve the efficiency, multiple spread
spectrum signals can be multiplexed and simultaneously
transmitted. It is possible to simultaneously transmit
multiple signals without synchronization among the signals,

5   which is not possible with OFDM. This is known as the method
of asynchronous "code-division multiple-access" (CDMA). It is
advantageous in systems which must support multiple
independent users, where synchronization is often impractical.
However, spread spectrum communication systems with high

10   spectrum efficiency (greater than about 1 bit/symbol/Hz) are
generally only possible when the multiplexed orthogonal
signals are synchronized.

In a synchronized spread spectrum system, it is known
that multiple signals may be simultaneously transmitted and

15   independently recovered so long as the spread signals are
orthogonal to each other. This is similar to the method of
OFDM. However, because each of the spread signals occupies
the full available bandwidth, it is not possible to use
conventional frequency-specific bandpass filtering or Fast-

20   Fourier Transform (FFT) mathematical processing to separate
the spread signals. Instead, the characteristics of each of
the spreading signals (spreading codes) are constructed so
that they may be separated from one another by the process of
correlation. Since the spread signals are orthogonal, the

8

crosscorrelation between any one of the spreading signals and

those signal components of the composite, multiplexed signal

which do not correspond to the spreading signal is

approximately zero. Therefore, each of the orthogonal signals

5   can be separated from the composite by correlating the

composite signal with the appropriate spreading signal. This

structure is known in signal processing literature as a bank-

of-matched filters. The data-specific modulation which is

impressed upon the spreading signal generally does not disturb

10   the orthogonality property of the signals. Unfortunately,

each of the above spread spectrum methods suffers in multipath

environments as will be discussed below.

Spreading signals or codes can be determined by various

methods. Because communication systems typically incorporate

15   some amount of error correction capability, it is often not

necessary for the spreading codes to be perfectly orthogonal.

The crosscorrelation magnitude for approximately orthogonal

(AO) signals is small but non-zero (e.g. $\approx 1/\sqrt{N}$ for Gold codes

where N is the code length). AO signals are often used for

20   spreading when the total crosscorrelation interference

generated by the interaction among all of the signals is

significantly smaller than the processing gain (e.g. smaller

by at least about 15 decibels). In the absence of multipath,

the performance of AO signals is inferior to perfectly

orthogonal signals because of the finite crosscorrelation sum
(known as the code-noise or self-noise). However, AO signals
have the advantage that the crosscorrelation sums typically do
not deteriorate as quickly when multipath is present because

5   they do not require precise synchronization.

Some spreading signals or sequences which have been
implemented in prior art spread spectrum systems include, but
are not limited to, distinct m-sequences, which are also known
as pseudonoise (PN) sequences or maximal-length sequences

10   [reference: D.V. Sarwate and M.B. Pursley, "Crosscorrelation
properties of pseudorandom sequences," *Proceedings of the
IEEE*, Vol. 68, No. 5, pp. 593-619, May 1980], distinct phases
of a single m-sequence [reference: S.L. Miller, "An efficient
channel coding scheme for direct sequence CDMA systems,"

15   *Proceedings of MILCOM '91*, pp. 1249-1253, 1991], orthogonal m-
sequences with bit stuffing as disclosed by Gutleber in U.S.
Patent No. 4,460,992, issued July 17, 1984, Gold codes, Kasami
codes, Hadamard codes, and Bent codes [reference: S.
Tachikawa, "Recent spreading codes for spread spectrum

20   communications systems," (translated) *Electronics and
Communications in Japan*, Part 1, Vol. 75, No. 6, pp. 41-49,
June 1992]. It is also possible to determine spreading
sequences which occupy the available bandwidth and which are
orthogonal using matrix eigenvector methods, such as disclosed

in U.S. Patent No. 4,403,331 by P.H. Halpern and P.E. Mallory,

issued September 6, 1983 or by using orthonormal wavelets as

disclosed by Resnikoff, et al. in U.S. Patent No. 5,081,645,

issued January 14, 1992. The above-listed spreading sequences

5   or signals may be used in this invention, as discussed

hereinafter.

A multiplexed spread spectrum system has a specified

number, N, of simultaneously transmitted orthogonal signals.

Each signal has "antipodal" (bipolar, binary phase-shift-

10   keying or BPSK) data modulation, where the source data message

bit determines the transmitted polarity of the spreading

signal. "Antipodal" modulation conveys one information bit

per baud per signal. Therefore, the overall bit rate of such

multiplexed systems is N bits per baud. It is possible to

15   increase the efficiency to 2N bits per baud by using both the

in-phase and quadrature phases of the RF signal carrier. This

is known as Quaternary Phase-Shift Keying or QPSK. A spread

spectrum system with N signals and QPSK modulation is

equivalent to a system with 2N signals and BPSK modulation,

20   where signal pairs have a quadrature phase relationship. The

information rate can be further increased by replacing the

two-level BPSK modulation of the spreading signal with a

plurality of distinct amplitude levels. This is known as m-

ary amplitude modulation. A disadvantage of m-ary modulation
is the increased sensitivity to noise.

Unfortunately, multipath significantly degrades the
performance of such multiplexed spread spectrum systems. In a
5   system with a single spread signal (N=1), multipath
propagation causes various reflections or echoes of the LOS
signal path to combine with varying amplitudes, phases, and
delays. Thus, the signal becomes a source of interference to
itself for all propagation paths with delays other than the
10   one which is established by the process of synchronization as
the reference path. This is usually the LOS path with the
largest received signal strength. The correlation of a single
signal with itself, expressed for varying delays, is defined
as the autocorrelation function.

15   The amount of interference caused by an echo at a
specific delay is determined by the magnitude of the
autocorrelation function for the spread signal at that delay,
weighted by the amplitude of the received echo path relative
to the LOS path. If the processing gain is much larger (e.g.
20   more than about 10 decibels) than the magnitude of the
autocorrelation interference, the system will be robust
against multipath.

However, in a multiplexed system (i.e. where N>1), the
additional or other signals act as sources of interference.

12

Multipath disturbs the orthogonality between signals and increases the magnitude of crosscorrelation interference. The signals may then no longer be perfectly orthogonal or even approximately orthogonal in the face of multipath. Whereas

5 with a single signal, only that signal is a source of interference to itself, in a multiplexed system with N signals, each one of the signals may also be affected by all (N-1) of the remaining signals. Even when the crosscorrelation between any pair of signals is relatively

10 small, the effective (N-1) amplification of the interference is a significant problem. For example, when the multiplexed signals are modeled as statistically independent and uncorrelated random processes, and the standard deviation of the crosscorrelation magnitude between a pair of signals is

15 $1/\sqrt{M}$, the detected signal-to-noise ratio in severe multipath, where there are equal parts echo path and LOS path, is only approximately $M/(N\cdot\sqrt{M})=\sqrt{M}/N$, which approaches zero decibels as N approaches M which significantly decreases the reliability of the demodulation. As a result, the number of multiplexed

20 signals must be limited to a number much less than $\sqrt{M}$, which diminishes the potential bit rate throughput of the system. The problem of crosscorrelation interference is less severe (but still present) in OFDM systems because the signals are narrowband and occupy relatively distinct frequency regions.

13

Even with completely random phases due to varying echo arrival

times, the narrowband signals which are separated in carrier

frequency by more than one frequency spacing ($1/\Delta T$ where ΔT is

the baud interval) retain most of their orthogonality

5   properties.

It is known that crosscorrelation interference can be

reduced by the use of an adaptive digital equalizer in the

receiver as shown in prior art Figure 2, for example. The

equalizer attenuates the effects of the signal path echoes by

10   either subtracting out the signal contributions of the echoes

directly from the received signal (usually performed at the

intermediate frequency) or by removing the effects of the

echoes from the metric which is used in the bit determination

(i.e. decision-feedback equalization). However, digital

15   equalizers may require significant amounts of hardware to

implement. The required update rate for the equalizer

coefficients can be very fast, typically kilohertz rates for

VHF carrier frequencies and automobile velocities. Because

multipath conditions rapidly change in the land mobile

20   environment, it is difficult to implement an equalizer which

can completely compensate for the effects of multipath in all

conditions and all instances. Therefore, even with an

equalizer, there may be a residual level of multipath

interference.

14

Error correction coding (ECC) is also known to be used to combat multipath in communication systems. This is a method that does not diminish the effective distortion. Instead, large amounts of coding redundancy are used to increase the

5   reliability of the bit information so that the system is tolerant of large amounts of interference, and consequently high bit error rates. Unfortunately, the implementation cost of the redundancy is additional overhead in the bit rate throughput, which reduces the available bit rate for the data

10   message. The overhead is expressed as the "code rate," which is the average ratio between the data message size in bits and the encoded (i.e. including redundancy) message size. As the redundancy is increased, the code rate diminishes towards zero. A communication system with ECC exhibits coding gain

15   when compared to a system without ECC or with an inferior ECC system. Coding gain is a characteristic, similar to processing gain, which expresses the improvement in performance brought about by redundancy after decoding the ECC code. It may be interpreted as an effective improvement in

20   the signal-to-noise ratio present in the equivalent demodulation method without ECC. Because the conditions for continuous mobile reception are difficult and require high coding gains, practical code rates for communication systems

are usually about one-half or less, which is equivalent to one
hundred percent (100%) redundancy.

There is considerable prior art in the multiplexing
and/or modulation of orthogonal signals. Two types of
5   conventional modulation are known as "antipodal" and
"biorthogonal" modulation respectively. Figure 1 illustrates
functional blocks of a prior art system for the transmission
of multiplexed orthogonal digital signals with "antipodal"
modulation (either spread spectrum or narrowband). Source bit
10 information (message) 1 is randomized by scrambler 2, which
multiplies binary message 1 by a scrambling polynomial such as
that specified by the CCITT V.29 specification [reference:
W.T. Webb and L. Hanzo, *Modern Quadrature Amplitude
Modulation*, London: Pentech Press, Ltd., 1994, pp. 266-268].
15 The coefficients of the binary polynomial are selected to
cause the elimination of long runs of consecutive binary ones
or zeros and to cause the resulting binary message to have
approximately equal probabilities for binary digits zero (0)
and one (1). The polynomials are typically m-sequences, but
20 this is unrelated to the possible use of m-sequences as
spreading signals.

Scrambling function 2 is important because the source
message may not be random. A non-random message biases the
error statistics and can diminish the effectiveness of the

ECC. Furthermore, many synchronization and equalization

algorithms require approximately random data for proper

operation. The scrambling method establishes a bijection

between the source message and scrambled source message which

5   may be uniquely inverted in the receiver.

Redundancy is added to the scrambled source message by

error correction code (ECC) encoder 3. The resulting sequence

of bits leaving encoder 3 is the encoded message. The optimum

error correction encoder depends upon the expected

10   characteristics of the error distribution, which requires

knowledge of the specific modulation method and the expected

RF channel impairments. Convolutional codes [reference: A.J.

Viterbi, "Convolutional codes and their performance in

communication systems," *IEEE Transactions on Communications,*

15   Vol. 19, No. 5, pp. 751-772, October 1971] have been found to

be optimum in circumstances where the error rate is

substantially random, uncorrelated, and resembles a normal or

Gaussian distribution. However, in bursty error environments,

block codes may be used (e.g. binary BCH codes, Reed-Solomon

20   codes, concatenated parity-Reed-Solomon codes, and quadratic

residue codes) [reference: X. Chen, I.S. Reed, and T.K.

Truong, "A performance comparison of the binary quadratic

residue codes with the 1/2-rate convolutional codes," *IEEE*

Transactions on Information Theory, Vol. 40, No. 1, pp. 126-

136, January 1994. In encoder 3, the length of the encoded

source message is increased by a factor which is the

reciprocal of the encoder code rate compared to the scrambled

source message.

5   The error encoded message is re-ordered by interleaver 4.

Interleaving is a method of time diversity and is important in

RF environments, for example, where burst errors are prevalent

due to signal fading, such as in land mobile communication.

Interleaver 4 disperses the encoded message so that

10   consecutive encoded bits become separated by a sufficient time

interval to eliminate probable correlation between errors.

The interval is typically chosen as the amount of time

required to traverse a distance which corresponds to several

wavelengths of, for example, the RF carrier frequency at a

15   medium vehicle velocity (e.g. 30 miles/hour). Interleaver 4

is implemented with random-access memory (RAM) and a shuffling

algorithm which is used to address the RAM. A typical

shuffling algorithm is the convolutional interleaver algorithm

[reference: J.L. Ramsey, "Realization of optimum

20   interleavers," *IEEE Transactions on Information Theory*, Vol.

16, No. 3, pp. 338-345, May 1970], which is unrelated to

convolutional error coding. The interleaving process is

reversed in the receiver by deinterleaver 20 in order to

recover the original encoded bit sequence.

18

The encoded and interleaved message is divided into groups of bits, which are to be simultaneously transmitted in a single information symbol or baud, by serial-to-parallel converter 5. The bit width at the output of converter 5,

5   designated N, corresponds to the number of orthogonal signals that is simultaneously transmitted from the Figure 1 transmitter in this antipodal system. Each orthogonal spreading signal in the plurality of multiplexed signals is generated by a corresponding signal generator 6. Each signal

10   generator 6 is implemented with a RAM or read-only memory (ROM) look-up table for arbitrary signals or tapped linear shift feedback registers (LSFR) for m-sequences. OFDM-like signals, for example, can be generated by an Inverse Fast Fourier Transform (FFT) algorithm. Each generated signal is

15   distinct across all signal groups.

The characteristics of each signal generator 6 in the antipodal system determine whether or not the system is characterized as being narrowband or spread spectrum. Whether the Figure 1 system is a spread spectrum or narrowband (e.g.

20   OFDM) system is determined by the output of signal generator 6. For antipodal data modulation, each of the encoded bits determines the polarity of the corresponding orthogonal signal for the duration of the signal baud. Modulation of the signal polarity is performed by multiplying 7 the operated signal by

either a positive or negative factor of unity, as determined

by the switch, which is represented as polarity multiplexor

(MUX) 8. MUX 8 is a switch which propagates only one of a

plurality of inputs according to one of a plurality of control

5   bits. In each multiplexor 8, the controlling input bit(s) is

labeled "S" to distinguish it from the data inputs.

A composite digital signal is formed by the summation at

9 of the polarity-modulated orthogonal signals from each

multiplier 7. In many such Figure 1 systems, the preceding

10   processes are typically implemented with digital circuits as

shown. Prior to transmission, the signal is converted from

the digital representation to an analog representation by

digital-to-analog converter (DAC) 10. The composite signal is

then amplified and translated to the RF carrier frequency to

15   be propagated in free-space by RF up-converter 11. Up-

converter 11 typically includes a mixer, a sinusoidal carrier

frequency source or local oscillator (LO), a bandpass filter

to limit noise and to eliminate the image-frequency generated

by the mixer and other spurious frequency artifacts, and a

20   tuned power-amplifier and transmitter antenna system to

generate high-power RF signals. A linear combiner 9 is used

to combine or sum the orthogonal signals when they are in

analog form, while a summer or adder 9 may be used for

20

combining or forming the composite signal in digital

environments.

A block diagram of a corresponding prior art antipodal

receiver system with orthogonal multiplexing is shown in

5   Figure 2. Again, the Figure 2 receiver may receive either

narrowband or spread spectrum multiplexed orthogonal signals,

depending upon the output of generators 18. The received RF

signal is first amplified and filtered with a bandpass filter

in tuner 12 to remove interference and noise which is outside

10   of the bandwidth of the composite of orthogonal signals. The

RF signal is typically frequency-translated to a lower

frequency, known as the intermediate frequency (IF), for

further processing, which simplifies the implementation. In

some digital systems, the IF frequency is zero, which requires

15   that the remaining processes be implemented with complex (i.e.

real and imaginary components) digital arithmetic. These

combined RF functions are abbreviated as RF tuner 12.

In many conventional Figure 2 systems, the signal is

converted from an analog representation to a digital

20   representation by analog-to-digital converter (ADC) 13. The

received signal is made synchronous with the transmitter in

baud frequency and carrier frequency by baud clock recovery 14

and carrier frequency recovery 15 subsystems. Typically,

these functional blocks are implemented with early/late or

pulse-swallowing algorithms, phase-locked loops (PLLs), and/or frequency-locked loops (FLLs). The overall function of recoveries 14 and 15 is to eliminate frequency offsets caused by variation in components and the effect of Doppler frequency

5   shift. The synchronization also establishes the proper timing so that the magnitude of the crosscorrelation between the multiplexed orthogonal signals will be at a minimum at an instance in the baud interval known as the sampling point.

The digitized signal is optionally equalized 16 in some
10   prior art systems as discussed above in order to attempt to mitigate some of the effects of multipath. Equalizer 16 may be implemented with a finite impulse response (FIR) transversal filter (tapped delay line). The coefficients of the equalization filter are computed by a tap-weight update
15   algorithm. The number of coefficients is determined so that the time interval spanned by equalizer 16 is at least as large as the expected multipath delay spread. In the VHF RF channel, the equalizer 16 extent is typically more than about ten (10) microseconds and less than about fifty (50)
20   microseconds. There are various methods for updating the tap weight coefficients in the equalization filter, including, but not limited to, least mean square (LMS), recursive least squares (RLS), and Levinson-Durbin algorithms, all of which are known.

22

The equalized signal is applied to a plurality of
correlators 17. The function of each correlator 17 is to
compute the correlation sum between the received signal and
one of the reference orthogonal signals 18 by summing the

5   pairwise product of the two signals. Since the proper timing
has been established by synchronization circuits 14, 15 and
equalizer 16, it is only necessary to compute the correlation
sum at the nominal sampling point for each orthogonal signal.
Without proper synchronization, it would be necessary to

10   compute the correlation sums for each orthogonal signal
corresponding to various delays and then determine the
maximum, which increases the receiver complexity
significantly.

The orthogonal reference signals 18 of the receiver are

15   identical to those in the transmitter (6 in Figure 1). These
orthogonal reference signals (either spread spectrum or
narrowband) are generated in the receiver by a plurality of
signal generators 18, one generator 18 corresponding to each
correlator 17. The correlation sums determined by correlators

20   17 at the sampling point are reorganized as a serial sequence
of sums by parallel-to-serial converter 19. For soft-decision
maximum likelihood (ML or Viterbi) decoding of convolutional
error codes, approximately three bits of quantization
information is preserved for each correlation sum. For hard-

decision decoding of ECC codes, only one bit of the

correlation sum is preserved for each correlation sum. The

sequence of correlation sums is the received code sequence

prior to decoding.

5   For the method of OFDM, the correlators and signal

generators in the receiver are typically implemented in

parallel with the Fast Fourier Transform (FFT) mathematical

algorithm.

The additional bits of quantization information, beyond

10   the sign bit, for each of the correlation sums provides

reliability information that can be used to improve the

performance of the Viterbi soft-decision decoder. The bits

determine an approximate measure of the distance between the

correlation sum and the zero value. The zero value is

15   typically the decision-switching threshold between the two

possible polarity values for antipodal modulation. In

principle, as the distance between the correlation sum and the

zero value increases, the reliability of the polarity estimate

also improves. Unfortunately, if the amplitude of the

20   received signal fluctuates widely and is not sufficiently

compensated for, then the magnitude of the distance between

the correlation sums and the zero value also varies widely.

This significantly diminishes the utility of the additional

reliability bits since it may not be possible to determine if

the variation in distance is due to uncompensated gain change

or an increase in the amount of noise present in the

correlation sum.

The shuffling effect of interleaver 4 in the Figure 1

5   transmitter is reversed by deinterleaver 20 in the receiver.

Although the time interval represented by the memory size of

deinterleaver 20 in the receiver is the same as interleaver 4

in the transmitter, the implementation of deinterleaver 20

typically requires more RAM than the corresponding interleaver

10   because of the importance of preserving reliability

information associated with the correlation sums.

After deinterleaving 20, the code sequence is decoded by

error correction code decoder 21 to determine the estimate of

the scrambled source message. The ECC decoder reverses the

15   effects of the ECC encoder according to the error correction

code, substantially reducing the number of bit errors after

decoding. The size of the decoded message is made smaller

than the message prior to decoding by an amount corresponding

to the code rate factor. The decoded message is unscrambled

20   by descrambler 22, which reverses the bijection established by

the scrambling in the transmitter, the resulting message 23 is

substantially similar to the original source message 1 except

for the occurrence of bit errors.

When the data modulation impressed upon the multiplexed
orthogonal signals is antipodal (i.e. signal polarity), the
bit error probability or rate, P_b, in the presence of additive
white Gaussian noise (AWGN) is determined by the following
5   equation [reference: G.R. Cooper and C.D. McGillem, *Modern
Communications and Spread Spectrum*. New York: McGraw-Hill,
Inc., 1986, pp. 159]:

$$P_b = Q \left(\sqrt{\frac{2 \cdot E_s}{N_{bo}}} \right) \tag{1}$$

10   where E_s is the energy in any one of the orthogonal signals,
which are assumed to be equiprobable and equal in energy, N_{bo}
is the noise spectral density, and Q is the complementary
cumulative distribution function for the Gaussian probability
density function (a.k.a. the Marcum Q function) [reference:
15   G.R. Cooper, et al, ibid., pp. 423-425]. The noise spectral
density is determined by measuring only the noise power
through the bandwidth of the orthogonal signal. Generally,
the total transmitter power is divided equally among the
modulated orthogonal signals. The process of antipodal data
20   modulation does not change the signal energy; only the
polarity of the resulting correlation sum computed in the
receiver is affected.

An exemplary distribution of the correlation sum for the
received signal for any one of the antipodal signals in the

26

prior art multiplexed system (Figures 1-2) with additive white

Gaussian noise is shown as a graph in prior art Figure 3. The

abscissa values correspond to the possible correlation sum

values except they are normalized by the signal energy E_s. In

5   the absence of noise, the distributions would be replaced with

two point masses, centered at minus one (-1) and plus one

(+1), respectively, since there are two possible polarity

values. As the result of noise, the point masses are smeared

out into continuous distributions. The combined effects of

10   noise and the antipodal modulation result in two regions 24

and 25, which correspond to negative polarity modulation

(arbitrarily, encoded bit value 0) and positive polarity

modulation (arbitrarily, encoded bit value 1). As a result of

the assumption of Gaussian noise impairment, the distribution

15   of the two regions intersect, which is shown as shaded region

26. Bit errors occur when the correlation sum values are

distributed in shaded region 26.

The error probability P_b, determined in equation (1), is

the area of intersection weighted by the *a priori* bit

20   probabilities. A significant factor in determining the error

rate P_b is the Euclidean distance 27 between the mean abscissa

values of the indicated regions. For antipodal modulation,

this distance is $2E_s$ taking into consideration the

normalization of the abscissa values shown in Figure 3. This

distance is represented in the numerator of the radical

fraction in equation (1). The use of error correction coding

increases the effective distance by the amount of the coding

gain. Although the gain is only realized after the complete

5   ECC decoding process is performed, the gain can be interpreted

as if there had been an improvement in the distance prior to

decoding. According to the first-error-event approximation

[reference: A. Dholakia, *Introduction to Convolutional Codes*

with Applications. Dordrecht: Kluwer Academic Publishers,

10   1994, pp. 104-108], the error probability after decoding, P^D_b

may be approximated for small error rates ($P^D_b < 1 \times 10^{-3}$) as:

$$P^D_b \approx Q \left(\sqrt{\frac{2 \cdot E_s \cdot d_{eff}}{N_{bo}}} \right) \qquad (2)$$

where Q, E_s, and N_{bo} are as in equation (1). d_{eff} is the

15   multiplying factor corresponding to the increase in distance

due to the ECC coding gain. The accuracy of equation (2)

degrades as the error rate increases towards 1×10^{-1}. Tabulated

approximations such as those determined by Burr are required

for higher error rates ($P^D_b > 1 \times 10^{-3}$) [reference: A.G. Burr,

20   "Bounds and approximations for the bit error probability of

convolutional codes," *Electronics Letters*, Vol. 29, No. 14,

pp. 1287-1288, July 1993]. Equation (2) is an approximation

and does not take into consideration the effects of the ECC

code's specific distance profile.

A commonly used ECC code in mobile communication systems
is the nonsystematic convolutional code with code rate 1/2 and
an input constraint length, designated K, of seven (7)
[reference: R. Johannesson, "Robustly optimal rate one-half

5   binary convolutional codes," *IEEE Transactions on Information
Theory*, Vol. 21, No. 4, pp. 464-468, July 1975]. For this
code, having binary generating polynomials 634 and 564, d_{eff},
known as the free distance, is 10. The Q function is
monotonic and rapidly decreases as its argument is increased

10   so that use of the code results in a substantial improvement
in decoded error performance. Larger constraint lengths (K
values) improve the distance even further but at the cost of a
significant increase in the complexity of the ECC decoder in
the receiver, which is proportional to $2^{(K-1)}$ for Viterbi

15   decoding. The ratio E_s/N_{b0} in equation (2) is the signal-to-
noise ratio (SNR) at the detection of any one of the antipodal
modulated signals in the multiplexed composite. When
multipath propagation or other dispersion is present, the
apparent noise term increases well above that due to

20   background noise and interference, and thermal noise, often
dramatically. Severe multipath can occur even when the
receiver is in close physical proximity to the transmitter and
there is ample signal strength. As the SNR approaches zero
decibels, where there are equal parts signal and interference,

the effective coding gain contribution of the ECC diminishes.
Therefore, it is advantageous to reduce the error rate prior
to decoding, even when powerful, low-rate codes are
implemented.

5   The crosscorrelation interference among multiplexed
orthogonal signals disturbed by multipath is, in general,
proportional to the number of signals. The interference
sources can be modeled as combining coherently or
incoherently, depending upon whether or not the
10   characteristics of the multipath are specular or diffusive,
respectively. The crosscorrelation interference can thus be
mitigated by reducing the number of orthogonal signals that
are simultaneously transmitted (i.e. summed in the composite).

       A modulation method which can be used in order to reduce
15   the number of simultaneously transmitted signals without
reducing the bit rate throughput is known as biorthogonal
modulation [reference: W.C. Lindsey and M.K. Simon,
Telecommunication Systems Engineering. Englewood Cliffs, New
Jersey: Prentice-Hall, Inc., 1973, p. 198, pp. 210-225]. The
20   essential difference between antipodal modulation (spread
spectrum or narrowband), previously described, and
biorthogonal modulation is illustrated in Figures 4 and 5,
respectively, for an exemplary transmitter system with two
generated orthogonal signals. In the transmitter system with

antipodal data modulation, shown in prior art Figure 4, two

information bits are conveyed from the transmitter to the

receiver by controlling the polarities of the two different

orthogonal signals that are simultaneously transmitted,

5   designated signals 28 and 29, respectively. After multiplying

7 signals 28 and 29 for polarity purposes, they are summed at

9 to form a composite. Each orthogonal signal conveys a

single bit by the determination of its polarity with respect

to an arbitrary reference polarity. The information bit is

10   recovered in the receiver (see Figure 2) by determining the

polarity of the correlation sum between the received composite

signal and the reference orthogonal signal; arbitrarily,

positive polarity for bit value one (1) and negative polarity

for bit value (0), as discussed above.

15   In a transmitter system for biorthogonal modulation,

however, shown in prior art Figure 5, only one of two

orthogonal signals (either signal 31 or signal 32) is

transmitted in each baud interval. Thus, the Figure 5 system

transmits only one of the two orthogonal signals to the

20   receiver. The one orthogonal signal which is transmitted for

the duration of the baud in biorthogonal modulation conveys

two information bits. In prior art Figure 5, one information

bit is conveyed by the selection between which of the two

orthogonal signals (31 and 32) is transmitted for the duration

of the baud. The selection process is implemented with signal

multiplexor 33. Those bits in the encoded source message

which are associated with the control of the signal selection

are labeled as selection bit information 34.

5   For example, the transmission of signal 31 in a baud can

correspond to an encoded bit value of one (1) and, similarly,

the transmission of signal 32 (instead of signal 31) to the

encoded bit value of zero (0). The remaining information bit

is conveyed by modulating the polarity of the signal to be

10   sent. Polarity modulation is implemented by multiplying

both of the possible orthogonal signals 31 and 32 prior to

selection multiplexor 33 by the factor of positive or negative

unity using each polarity MUX 43, as shown in Figure 5, or,

equivalently, by multiplying the signal after selection

15   multiplexor 33 (not shown). The polarity of the transmitted

signal (either 31 or 32) is determined by those encoded

message bits in the source message which have been associated

with polarity bit information 35. Together, the functional

blocks in Figure 5 illustrate a conventional biorthogonal

20   modulator where there are two possible distinct orthogonal

signals 31 and 32 (only one of which is sent). The encoded

message bits are divided among selection bits 34 and polarity

bits 35.

With biorthogonal modulation, the characteristics of the
transmitted signal are determined by both polarity and
selection bit information. In the receiver, the determination
of the polarity bit is related to the determination of the

5   selection bit. Consequently, the selection and polarity bit
error rates are coupled because the probability of error of
the polarity bits depends on that of the selection bits. The
coupling mechanism between the determination of the selection
and polarity bits in a prior art receiver for biorthogonal

10   modulation is illustrated in prior art Figure 6, which is a
block diagram of the relevant part of the receiver system for
the demodulation of the biorthogonally modulated signal shown
in Figure 5, corresponding to transmission of one of two
orthogonal signals, [reference: W.C. Lindsey and M.K. Simon,

15   *Telecommunication Systems Engineering*, ibid.]. The received
signal 54, having been tuned, synchronized and equalized as in
Figure 2, is correlated 17 with the two possible orthogonal
signals, 55 and 56, for the exemplary group, which correspond
to transmitter signals 31 and 32 respectively in Figure 5.

20   The magnitudes of the two resulting correlation sums are
computed by absolute value functions 57 and 58. A comparison
of the absolute values is made by comparator 59, which
determines the demodulated selection bit 60 by selecting the
signal with the larger correlation sum magnitude.

Simultaneously, the polarities of the two correlation sums are

determined by limiters 61 and 62. A limiter preserves only

the sign information (arbitrarily, binary one for positive

polarity and binary zero for negative polarity, randomly zero

5   or one for exactly zero). The result of the comparison in 59

is a binary value. The value controls multiplexor 63, which

determines which of the two polarity values, determined by the

limiters, is propagated as the demodulated polarity bit 64.

The polarity bit information which corresponds to the signal

10   with the largest correlation sum magnitude is selected. The

orthogonal signal with the largest correlation magnitude is

determined to have been the most likely signal transmitted.

The determined polarity and selection bits are propagated to

the next subsystem, which is parallel-to-serial converter 19,

15   as in Figure 2, to be deinterleaved and ECC decoded. Thus, in

prior art biorthogonal demodulation, the selection bit

estimate is determined and utilized in the determination of

the relevant polarity bit estimate, both functions being

accomplished in the demodulator.

20   Prior art Figure 7 illustrates an exemplary distribution

of the possible correlation sum values for the biorthogonal

receiver of Figure 6 with one of two possible orthogonal

signals transmitted in the presence of additive white Gaussian

noise. The distribution of Figure 7 is representative of the

34

signal exiting correlators 17 in prior art Figure 6. Since

the signals are equiprobable and possess equal energy, it is

sufficient to consider the possible correlation sums in the

event of the transmission of only one of the signals for all

5   baud intervals and with a fixed arbitrarily positive polarity.

The abscissa values are normalized as in Figure 3. In the

absence of noise, there would be two point masses, centered at

zero (0) and positive two (+2), respectively. The presence of

noise smears the point masses out into continuous

10   distributions. Distribution region 45 illustrates the

correlation between the received signal and the orthogonal

signal which corresponds to the correct selection bit. The

mean abscissa value for the region is two (2), not one (1) as

in Figure 3 for antipodal signals, because only one of the two

15   orthogonal signals was transmitted with biorthogonal

modulation. Thus, for a fixed composite signal transmitter

power, each of the two possible signals with biorthogonal

modulation can possess twice the signal energy compared to the

individual signals of antipodal modulation where both

20   orthogonal signals are transmitted.

Distribution region 46 in Figure 7 represents the

correlation between the received signal and the other

orthogonal signal in the group (i.e. corresponding to the

incorrect determination of the selection bit). The mean

35

abscissa value of region 46 is zero, not minus one (-1) as in Figure 3 for antipodal signals, because the two signals are orthogonal (i.e. zero crosscorrelation). Since the detection method for biorthogonal modulation is a comparison of

5   correlation sum magnitudes, errors occur in overlapping region 47.

However, biorthogonal system errors also occur in regions 48 and 49 which correspond to the images of the overlapping region 47 for the opposite polarity. These additional error

10   events occur in conventional biorthogonal systems (Figures 5-7) because the correlation sum polarity information cannot be used to determine which of the two signals was most likely to have been transmitted. Instead, the polarity of the correlation sum is used to determine the remaining information

15   bit, the polarity bit. In comparison to Figure 3, the combined area of the regions where errors occur for conventional biorthogonal modulation (Figure 7) is twice that of the antipodal system (Figure 3). The mean abscissa values of regions 46 and 45 in Figure 7 are separated by Euclidean

20   distance 50, which is equivalent to the distance for antipodal modulation.

Prior to consideration of the ECC decoding, the probability of error in the determination of the selection

bits for biorthogonal modulation (Figures 5-7) signals, P^s_b,

is:

$$P^s_b = 2 \cdot Q \left(\sqrt{\frac{2 \cdot E_s}{N_{bo}}} \right) \tag{3}$$

5   which is exactly twice the antipodal error probability given

by equation (1). The probability of error for the polarity

bits in prior art Figures 5-7 is more complicated and depends

upon the probability of error for the selection bits. If the

selection bit is correctly identified, which occurs with

10 probability $(1-P^s_b)$, the conditional polarity bit error

probability, $P^{p|s}_b$, is:

$$P^{p|s}_b = Q \left(\sqrt{\frac{2 \cdot 2 \cdot E_s}{N_{bo}}} \right) \tag{4A}$$

Once the correct orthogonal signal is identified by the

15 determination of the selection bits without error, the

demodulation of the polarity bit is similar to antipodal

demodulation. The antipodal error probability is often

abbreviated as:

$$P_b = Q = \left(\sqrt{\frac{2 \cdot E_s}{N_{bo}}} \right) \equiv Q \left(\sqrt{SNR} \right) \tag{4B}$$

20

where SNR is the detection signal-to-noise ratio. Therefore,

the polarity bit conditional error probability for

biorthogonal modulation exhibits a three (3) decibel (i.e.
factor of two in power) advantage in SNR when compared to
antipodal signaling. The reason for the polarity bit
advantage in SNR with biorthogonal modulation is that the
5   transmitted signal, representing only one of the two
orthogonal signals, has twice the signal energy of the
antipodal system for the same level of noise.

Prior art Figure 8 illustrates the improvement in the
Euclidean distance 51 between the mean abscissa values of the
10   regions 52 and 53 compared to the distance 27 in Figure 3 for
the distribution of the correlation sums for the two possible
transmitted polarity values when the selection bit is
correctly demodulated.

However, when the selection bit is incorrectly identified
15   in the biorthogonal demodulator, which happens with
probability P^s_b, the conditional probability of error for the
polarity bit is one-half (1/2) because the polarity of the
correlation sum corresponding to the incorrect signal is
unrelated to the correlation sum of the correct signal. The
20   polarity determination is then essentially random; in other
words, a coin toss. The overall error probability for the
polarity bits, P^p_b, is the weighted sum of the two conditional
error probabilities:

$$P^p_b = P^s_b \cdot \frac{1}{2} + (1 - P^s_b) \cdot P^{p|s}_b \qquad (5)$$

38

By inspection of equation (5), even under the idealistic
assumption that the conditional probability of error in
determining the polarity bits, $P^{p|s}{}_b$, is zero (i.e. no errors
which would require infinite SNR), the overall polarity bit

5   error rate would be only half that of the selection bit error
rate, $P^s{}_b$. Since the selection bit error rate was shown in
equation (3) to be twice that of the antipodal system with
equivalent throughput, the overall polarity bit error rate
can, at best, approach the antipodal error rate as the SNR

10   becomes infinite. The biorthogonal selection bit error rate
is then inferior to the bit error rate of the antipodal
system, assuming the same ECC coding. Therefore, the overall
error performance of prior art biorthogonal modulation
(Figures 5-8) is inferior to antipodal modulation (Figures 1-

15   4) for a specified SNR. The method of biorthogonal modulation
has the advantage of decreasing the crosscorrelation
interference by reducing the number of simultaneously
transmitted signals. This lowers the effective noise variance
in the biorthogonal system when compared to the antipodal

20   system in multipath. Unfortunately, however, any advantage
brought about by the use of biorthogonal modulation compared
to antipodal modulation is greatly diminished by the strong
dependence of the polarity bit error probability on the
selection bit error probability. An object of this invention

is to weaken this dependence through the use of ECC coding gain.

U.S. Patent No. 4,247,943 to Malm discloses the use of orthogonal or biorthogonal codewords in a receiver system for

5   a signal that is generated by frequency-shift keying together with local phase-shift-keying. The receiver makes use of crosscorrelation sums determined between the received signal and four orthogonal signals, corresponding to the in-phase and quadrature components at two frequencies, to demodulate the

10   signal.

Biorthogonal codewords [reference: W.C. Lindsey and M.K. Simon, _Telecommunication Systems Engineering_, ibid., pp. 188-194] are sets of binary sequences (i.e. ones and zeros) which are constructed so that the permissible codewords are either

15   pairwise orthogonal or complementary to each other. Biorthogonal codes are typically used to phase-modulate a narrowband sinusoidal signal. The use of biorthogonal codes is unrelated to biorthogonal modulation across a plurality of orthogonal signals and hence is also unrelated to the instant

20   invention.

U.S. Patent No. 4,730,344 to Saha discloses a four dimensional modulation method known as Quadrature-Quadrature Phase-Shift Keying (QQPSK). The system of the '344 patent makes use of the in-phase and quadrature components of a

signal with further data shaping of each component according

to two orthogonal pulse shapes. This corresponds to the prior

art system of Figures 1 and 2 with four simultaneously

multiplexed orthogonal signals with antipodal modulation.

5   U.S. Patent No. 4,587,662 to Langewellpott discloses a

time-multiplexed receiver system wherein the correlator

sampling point is controlled dynamically so as to take

advantage of the multiple correlation peaks present in a

received signal which is subject to multipath propagation.

10   The system of '662 allows for coherent signal reception which

permits the use of biorthogonal binary phase codewords in the

corresponding transmitter. The demodulation of biorthogonal

codewords is not novel and is thus unrelated to the instant

invention.

15   U.S. Patent No. 4,700,363 to Tomlinson et al discloses a

method of m-ary phase modulation and unequal error protection

whereby those bits corresponding to a lessor difference among

permitted phase states, being less reliable in the presence of

noise, are afforded additional error correcting code

20   redundancy. In the receiver system, after error decoding,

these bits are subtracted from the base signal in order to

demodulate the remaining bits. The system of '363 uses m-ary

phase-shift keying together with the possible use of

biorthogonal binary phase codewords. As previously discussed, this is unrelated to biorthogonal modulation.

U.S. Patent No. 5,305,352 to Calderbank et al discloses a single narrowband carrier Quadrature Amplitude Modulation

5 (QAM) system with unequal error protection. The method partitions the possible modulation states across the in-phase (I) and quadrature (Q) components to form sets which maximize the Euclidean distance determined across multiple information symbols. This technique is known as trellis-coded modulation

10 (TCM). The system of '352 extends prior art TCM by the definition of further classes which correspond to data of varying importance. High importance data is associated with "supersymbols" which are afforded additional error correction code redundancy. The decoded supersymbols are used in the

15 determination of the remaining sets of the phase states. The system of '352 uses prior art amplitude/phase-shift keying and is unrelated to the method of biorthogonal modulation with or without multiplexing. Generalized amplitude and phase-shift keying is not applicable to multiplexed spread spectrum

20 because the data modulation disturbs the orthogonality property. As with prior art unequal error protection system, the consequence of affording additional protection to some bits is to cause a reduction in the reliability of the remaining bits. A goal of the instant invention is to allow

42

unequal error protection without a degradation in performance

of any of the bits when compared to antipodal modulation. The

system '352 also omits the important function of interleaving,

the incorporation of which would require modification of the

5   modulation described, and may not be suitable for mobile

communication.

U.S. Patent Nos. 5,214,656 to Chung et al and 5,377,194

to Calderbank disclose methods of TCM modulation together with

unequal error protection and time-multiplexing so that

10   separate phase constellations can be associated with high

importance data and lower importance data. The phase

constellation for the high importance data is generated to be

less susceptible to the effects of noise compared to that for

the lower importance data thereby resulting in unequal error

15   protection. This is unrelated to the method of unequal error

coding whereby different error correction codes are applied to

the high and low importance bits. Both systems described in

the '656 and '194 patents utilize prior art QAM modulation and

are unrelated to the method of biorthogonal modulation. A

20   disadvantage of these systems is that the available time-

bandwidth product is halved by the partitioning of the baud

into disjoint intervals.

Modulation methods which make use of orthogonal or

biorthogonal groups of signals are disclosed by Yerbury et al

in U.S. Patent No. 5,063,560, by Bruckert et al in U.S. Patent

No. 5,235,614, by B.D. Woerner and W.E. Stark in "Trellis-

coded direct-sequence spread-spectrum communications," *IEEE*

Transactions on Communications, Vol. 42, No. 12, pp. 3161-

5 3170, December 1994, and by S.L. Miller in "An efficient

channel coding scheme for direct sequence CDMA systems,"

Proceedings of MILCOM '91, pp. 1249-1253, 1991, for use in

spread spectrum systems for "multiple-access." In a multiple-

access system, each orthogonal or biorthogonal signal group

10 corresponds to a distinct, independent user. The purpose of

multiplexing is to increase the number of users that can share

the RF channel by simultaneously transmitting and receiving

signals. If there are N simultaneous users and each user's

biorthogonal group of signals conveys $\log_2 M+1$ bits, then the

15 overall throughput of the channel, including all users, is

$N \cdot (\log_2 M+1)$. However, the throughput for each user's

transmitter and receiver is $\log_2 M+1$ bits. Whereas the goal of

multiple-access is to maximize the number of simultaneously

transmitted signals, and consequently users, the goal of the

20 instant invention is to reduce the number of simultaneously

transmitted signals in order to decrease the crosscorrelation

interference while maintaining the same information

throughput. The transmitter and receiver system of the

invention have a throughput equal to the overall channel throughput.

Accordingly, it is apparent from the above that there exists a need in the art for: (i) limiting or diminishing the coupling between the selection and polarity error probabilities in biorthogonal modulation; (ii) mitigating or reducing the crosscorrelation interference caused by the interaction between multiplexed signals; (iii) reducing the decoded bit error rate in biorthogonal modulation as compared to antipodal modulation in the face of additive Gaussian noise and multipath; and (iv) providing a communication system (e.g. RF spread spectrum) which is markedly improved with respect to multipath.

SUMMARY OF THE INVENTION

This invention fulfills the above-described needs in the art by providing a method and system for the transmission and reception of multiplexed orthogonal signals (e.g. spread spectrum) for use in a simplex or duplex digital communication system via wire-line or atmospheric free-space. In certain embodiments, the transmitter and receiver architectures are able to make use of the same set of orthogonal or approximately orthogonal signals (e.g. spreading signals) that are implemented in prior art orthogonal multiplexed systems

with antipodal data modulation. This is advantageous for a

system with high spectrum efficiency where it may be difficult

to determine additional spreading sequences because of the

time-bandwidth product limits. The method significantly

5   reduces the crosscorrelation interference caused by the

diminished orthogonality between the multiplexed signals as

the result of multipath propagation and other dispersive

effects. This interference is mitigated by reducing the

number of orthogonal signals that are simultaneously

10   transmitted, without affecting the bit rate throughout. In a

preferred embodiment, the number of simultaneous signals is

only half that required for antipodal modulation.

        According to further embodiments, the biorthogonal

modulation and unequal error protection aspects of this

15   invention may be applied to QPSK systems, with or without

frequency-division multiplexing (FDM), and/or the like.

        According to certain embodiments, biorthogonal data

modulation is used to determine which spreading signals are

simultaneously transmitted and the polarity of such signals.

20   The plurality of generated orthogonal signals is organized

into a plurality of biorthogonal groups, wherein only a

fraction of these signals are transmitted.

        In certain embodiments, the number M of signals in each

group is two. In such embodiments, each group conveys two

information bits per symbol through the choice of signal
(selection bit) and the polarity of the signal (polarity bit).
Since only one signal from each group is transmitted, for all
values of M, the number of simultaneous signals transmitted is

5   reduced compared to the prior art system with equivalent
throughput and antipodal modulation, which has two transmitted
orthogonal signals wnen M=2. All signals across the plurality
of groups are distinct and orthogonal. Thus, signals from a
plurality of groups can be simultaneously transmitted and

10   recovered without interference in the absence of multipath.
When multipath is present, the crosscorrelation interference
is reduced because of the diminished number of signals which
can interfere with one another.

     The use of biorthogonal data modulation combined with

15   orthogonal multiplexing reduces crosscorrelation interference
as set forth below with respect to this invention. However,
the advantage that is obtained by reducing the number of
simultaneously sent signals with multiplexed biorthogonal
modulation may be further advanced by using unequal error

20   protection. This invention results in an improvement in the
decoded error rate when compared to both conventional
biorthogonal and antipodal modulation. Thus, the viability of
biorthogonal modulation for multiplexing spread spectrum
signals in multipath is a direct result of the method. The

benefits of the method are most significant when the

multiplexed signals are wideband or spread spectrum orthogonal

signals, although the system/method may be used with other

signal types as discussed herein.

5   In certain embodiments, biorthogonal modulation conveys

the total bit rate throughput, including error correction

redundancy, equally divided among the selection bits and the

polarity bits. The uncorrected error rate (i.e. prior to

error code decoding) of the selection bits determined at the

10   receiver is increased compared to an equivalent system with

antipodal modulation, even with the method. According to

certain biorthogonal embodiments of this invention, the

polarity bit error rate is made to be substantially

independent of the selection bit error rate. This is

15   accomplished by weakening the coupling mechanism between the

error probabilities of the selection and polarity bits through

the use of coding gain from the error correction code. The

result is an effective increase in the signal-to-noise (SNR)

at the receiver in the determination of the polarity bits,

20   when compared to antipodal modulation. The effective increase

in the detection SNR of the polarity bits allows for the use

of less error control redundancy on the polarity message bits

(i.e. higher code rate), without increasing the resulting

error rate compared to antipodal modulation. The overall ECC

code rate is the average of the code rates for the selection
and polarity bits. Therefore, while maintaining a constant
overall code rate, increasing the code rate for the polarity
bits allows for a corresponding decrease in the code rate for

5   the selection bits. The system then has the characteristic of
unequal error protection (UEP). Decreasing the code rate for
the selection bits increases the redundancy afforded to the
protection of the selection bits. Thus, the decoded selection
bits are made more robust.

10   The error rate of the polarity bits is substantially de-
coupled from the error rate of the selection bits by the
receiver architecture of the system according to certain
embodiments. In prior art biorthogonal systems, the polarity
bits and selection bits are both determined prior to ECC

15   decoding. However, according to certain embodiments of this
invention, the selection bits are demodulated prior to the
polarity bits. The error correction code corresponding to the
selection bit information is completely decoded. The
resulting estimate of the underlying data message bits for the

20   selection bits is then re-encoded using the same ECC code. As
a result of the coding gain of the ECC code, the error rate of
the re-encoded selection bits is substantially lower than that
of the selection bits prior to decoding. The re-encoded
selection bits are then used to determine which correlation

sums are examined in order to determine the polarity bits in
the biorthogonal receiver. Unlike prior art systems, the
error rate of the polarity bits is found to no longer be
directly determined by the selection bit error rate prior to

5   decoding. Instead, the polarity bit error rate is
substantially determined by the conditional error probability
of the polarity bits alone. The decreased error rate is shown
to correspond to an effective increase in the detection SNR of
the polarity bits by approximately three decibels in certain

10   embodiments.

In addition to the improved error rate compared to both
prior art antipodal and biorthogonal systems, the method is
shown to reduce the effects of gain instability present at the
receiver. Uncompensated amplitude variations in the received

15   signal degrade the effectiveness of soft-decision
convolutional decoding by the Viterbi algorithm, which is
otherwise optimum in a maximum-likelihood sense. According to
the method, the effects of gain instability are mitigated by
the use of biorthogonal modulation and a normalized comparison

20   metric in the determination of the selection bits, in contrast
to the polarity metric of prior art antipodal systems.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is a block diagram of a transmitter for a prior art system with antipodal modulation and orthogonal multiplexing.

5   Figure 2 is a prior art block diagram of the Figure 1 corresponding receiver.

Figure 3 is a prior art graph illustrating an exemplary distribution of the correlation sums determined in the Figure 2 receiver for one of the signals in the multiplexed

10   orthogonal system using antipodal modulation when the impairment is additive white Gaussian noise (AWGN).

Figure 4 is a prior art block diagram of the antipodal signal set modulator in the Figure 1 transmitter system with two orthogonal signals being combined.

15   Figure 5 is a prior art block diagram of a biorthogonal signal set modulator in a transmitter system with two generated orthogonal signals, one of which is transmitted.

Figure 6 is a block diagram of the prior art method of biorthogonal demodulation in the Figure 5 communication

20   system.

Figure 7 is a graph illustrating an exemplary distribution of the correlation sums in the determination of the selection bit in the Figure 6 prior art biorthogonal receiver when the impairment is AWGN.

Figure 8 is a prior art graph illustrating an exemplary
distribution of the correlation sums in the determination of
the polarity bits in the prior art Figure 6 biorthogonal
receiver when the impairment is AWGN and the selection bit is
5   correctly demodulated.

Figure 9 is a block diagram of a transmitter system for
biorthogonal modulation with orthogonal multiplexing according
to an embodiment of this invention.

Figure 10 is a block diagram of a biorthogonal modulator
10   according to an alternative embodiment, when four orthogonal
signals (M=4) are provided in each group, and only one
orthogonal signal is transmitted for each group.

Figure 11 is a block diagram of the biorthogonal
demodulator for the receiver in the Figures 9 and 12 systems
15   when M=2, this figure illustrating advantages over the prior
art regardless of the number of biorthogonal groups.

Figure 12 is a block diagram of a receiver system for
biorthogonal modulation and orthogonal multiplexing according
to an embodiment of this invention.

20   Figure 13 is a block diagram of the symbol deinterleaver,
polarity bit demodulator, and error correction decoder
subsystems in the Figure 12 receiver system for biorthogonal
modulation and orthogonal multiplexing, although this
subsystem may be used even without multiplexing.

Figure 14 is a graphical depiction of the hierarchical

structure of the ECC codeword which may be used with partial-

code-concatenation in the Figures 9-13 transmitter and

receiver systems.

5   Figure 15 is a graph which illustrates the decibel loss

in effective SNR that occurs when biorthogonal modulation is

used compared to antipodal modulation prior to ECC decoding.

The graph also illustrates the overall decibel gain that is

obtained by the use of certain embodiments of the invention,

10   as a function of SNR.

DETAILED DESCRIPTION OF
CERTAIN EMBODIMENTS OF THIS INVENTION

Referring now more particularly to the accompanying

drawings in which like reference numerals indicate like parts

15   throughout the several views.

The block diagram of the transmitter system according to

an embodiment of this invention is shown in Figure 9. The

prior art Figures 1-2 communication system with N (N is even)

generated orthogonal multiplexed signals, all simultaneously

20   transmitted with antipodal data modulation, is replaced with

the system of Figure 9 with only N/2 simultaneously

transmitted orthogonal signals with biorthogonal data

modulation. This results in a dramatic reduction in the

crosscorrelation interference of a factor between three (3)

and six (6) decibels relative to the antipodal system of

Figures 1-2, when the orthogonality between signals is

disturbed by multipath or dispersion. If the crosscorrelation

interference across signals combines coherently, as is the

5   case with specular multipath, the improvement is closer to six

(6) decibels. If the crosscorrelation interference across

signals combines incoherently, as with noise or diffuse

multipath, the improvement is closer to three (3) decibels.

The functional blocks in the Figure 9 multiplexed biorthogonal

10   transmitter corresponding to the digital-to-analog converter

10, and RF up-converter 11 are as in Figure 1 for the

antipodal system. The source message 101 is made

substantially random by scrambler 102 for reasons discussed

above regarding Figure 1. In certain embodiments, separate

15   scramblers are required for those message bits which are

associated with the selection bits and those associated with

the polarity bits, when the selection message bits are

considered more important than the polarity message bits. The

plurality of antipodal modulators, where each modulator is

20   comprised of 6, 7, and 8 in Figure 1, is replaced with a

plurality of biorthogonal modulators 36 in Figure 9.

The Figure 9-15 system and method is adapted to transmit

and receive RF signals with carrier frequencies more

preferably from about 30 megahertz (MHz) to 8 gigahertz (GHz),

where the effects of multipath propagation are significant.
This frequency range includes commercial FM radio broadcast
(88 MHz - 108 MHz), television and advanced television (ATV)
broadcast (54 MHz - 88 MHz, 174 MHz - 216 MHz, and 470 MHz -

5   890 MHz), and the proposed ranges for terrestrial new-band,
in-band on-channel (IBOC), in-band adjacent-channel (IBAC),
and satellite digital audio radio services, such as L-band
(1.0 GHz - 2.0 GHz), S-band (2.0 GHz - 4.0 GHz), and C-band
(4.0 GHz - 8.0 GHz). The system and method according to

10   certain embodiments can also be used to transmit/receive
signals at frequencies above 8 GHz, such as direct broadcast
satellite (DBS) in the K bands (10 GHz to 36 GHz), but
reception in these bands is typically limited by available
signal strength in the line-of-sight propagation path. The

15   system and method are not applicable to incoherent
communication systems because biorthogonal modulation requires
coherent detection. The system and method is utilized for
carrier frequencies below 30 MHz (e.g. commercial AM radio
band between 535 kHz and 1,705 kHz), where the transmission

20   medium is subject to dispersion.

In addition to free-space propagation, this invention is
applicable to wire-line systems such as telephone service,
ISDN, ATM, SONET, and switched-56, where the transmitter and
receiver are connected electrically. Although these wire-line

system do not have multipath of the type described above, echoes caused by discontinuities and impedance mismatches can generate significant crosscorrelation interference. Furthermore, the characteristics of the electrical circuit

5   connecting the transmitter and receiver, such as coaxial cable, typically have frequency-selective properties and cause dispersion. This invention mitigates these deleterious effects.

Each biorthogonal modulator 36 of Figure 9 is as shown in

10   Figure 5 for the embodiments of this invention where two orthogonal signals are present in each biorthogonal group (i.e. M=2). The time-diversity interleaver function 37 is also required, but its internal architecture is different from that 4 in Figure 1. It will be discussed below that in order

15   for the system to properly operate, it is necessary that the shuffling algorithm of interleaver 37 (and consequently the deinterleaver) possess the characteristic of symbol interleaving and not bit interleaving.

With conventional antipodal or prior art biorthogonal

20   modulation without multiplexing, either a bit interleaver or a symbol interleaver can be implemented. The determination is made by understanding the characteristics of the RF propagation and the ECC method. Typically, bit interleavers are used for binary convolutional codes. Symbol interleavers

are used for multiple-bit block codes (e.g. Reed-Solomon

codes). The function of the interleaver in the transmitter

and the deinterleaver in the receiver is to cause any temporal

correlation between consecutively transmitted bits to be

5   substantially eliminated by the shuffling process. The

interleaver does not change the fundamental error rate, but

its use results in an error distribution which resembles a

random, uncorrelated process, which is important for optimum

operation of the ECC. The difference between a bit

10   interleaver and a symbol interleaver is that in a symbol

interleaver, the bits are first divided into groups. Each

group consists of a plurality of bits. The temporal

relationship between consecutive groups is made substantially

random by shuffling, but the ordering within the group is

15   preserved by the interleaving process. The groups of bits are

known as symbols. In a bit interleaver, the group size is one

bit.

In the Figure 9 transmitter system, the minimum width of

the symbol in the interleaver 37 is two bits for the M=2

20   embodiment with two orthogonal signals in each biorthogonal

group. This presumes that the encoded selection and polarity

bits are organized as consecutive bit pairs. Therefore, the

shuffling process of interleaver 37 does not change the

characteristic that the polarity bit associated with a

particular selection bit is immediately adjacent to that bit

in the serial bit sequence. The symbol width can be increased

beyond two bits by multiples of two. If convolutional ECC

methods are implemented, it is not advantageous to increase

5   the symbol width beyond the minimum because burst errors

result in a degradation in the performance of the Viterbi

decoding algorithm. However, if multiple-bit block codes are

implemented, the optimum symbol size is related to the size of

the binary field of the code. For example, the optimum symbol

10   size for the Reed-Solomon block code over the Galois field in

2^m is m bits.

In the embodiments with two orthogonal signals in each

biorthogonal group (M=2), the minimum interleaver symbol

length is two bits, corresponding to the selection and

15   polarity bit for each group. The maximum interleaver symbol

length is determined by the characteristics of the error

correcting code. For convolutional codes, the optimum length

is two bits. However, for block error correcting codes such

as Reed-Solomon, the optimum symbol size corresponds to the

20   number of bits in the Galois binary-power field

representation.

A further difference from the prior art antipodal

transmitter system of Figure 1 is that the amount of

redundancy applied by error correction encoder 38 to the

selection bits is greater than that applied to the polarity

bits. This characteristic is labeled as unequal error

protection (UEP). UEP methods are typically used in the prior

art when the underlying message bits are of varying

5   importance. However, in certain embodiments of this

invention, UEP is used in the transmitter system even when the

message bits are of equal importance as a consequence of the

differentiation in error probabilities between the selection

and polarity bits at the receiver as will be discussed below.

10   The primary reason for the use of UEP in the system is due to

the construction of the biorthogonal receiver according to the

invention. Further description of UEP is provided below in

the description of the receiver system architecture.

In the Figure 9 biorthogonal system, a total signal set

15   of N orthogonal signals is generated or used, although only

N/2 are simultaneously transmitted when M=2. Therefore, the

use of biorthogonal modulation in this embodiment does not

increase the required size of the signal set compared to

orthogonal multiplexing with antipodal modulation. This is

20   important in communication systems where the required bit

density is high (greater than one bit/symbol/Hz) and the time-

bandwidth product is limited by either bandwidth restrictions

or implementation complexity. In practical systems, the

maximum duration of the baud interval is limited by both the

transmitter and receiver complexity and the short-term

temporal stability of the transmission medium. For example,

Doppler frequency shift at high vehicle velocities (e.g.

sixty-five miles per hour) limits the maximum baud interval in

5   a mobile communication system for VHF frequencies to

approximately one millisecond. The available bandwidth is

typically limited by regulatory requirements for broadcast

applications and, to a lesser extent, by complexity.

Accordingly, an advantage of this invention is that no

10   additional signals are required relative to antipodal prior

art systems for the same bit rate throughput.

In the Figure 9 system, there are N/2 simultaneous

orthogonal signals in the composite transmitted signal. Each

orthogonal signal is determined by biorthogonal modulation of

15   a group of two orthogonal signals (i.e. M=2). Each group

conveys two information bits through the selection and

polarity bit information. The signals, in each group and

across all groups, must be distinct and pairwise orthogonal

because of the requirement for simultaneous orthogonal

20   multiplexing across biorthogonal groups.

If additional orthogonal signals can be determined for

each group (e.g. M=4 in Figure 10), the method is extended so

that each group is made up of M orthogonal signals, where M is

a binary power (M≥2). Each biorthogonal group conveys

60

$(\log_2 M)+1$ information bits in a baud. For the communication system with an overall bit rate throughput of N bits per baud, the required number of generated or used orthogonal signals, designated L, is:

$$L = \frac{N}{(\log_2 M)+1} \cdot M \qquad (6)$$

For example, if M=2, L=N; if M=4, L=4N/3; and if M=8, L=2N. The number of simultaneously transmitted orthogonal signals in the composite signal for one baud interval, designated N_L, is given by equation (7):

$$N_L = \frac{N}{(\log_2 M)+1} \qquad (7)$$

Equation (7) shows that as the number of orthogonal signals M in the biorthogonal groups increases exponentially, the total number of simultaneously sent orthogonal signals that are required to convey the information rate decreases only linearly. For example, if M=2, N_L=N/2; if M=4, N_L=N/3; and if M=8, N_L=N/4. Increasing M further diminishes the crosscorrelation interference by reducing the number of simultaneous signals at the cost of requiring a total signal set of very large dimension. With biorthogonal data modulation, only N_L signals are summed in the composite and simultaneously transmitted. However, in the receiver (see

Figures 11-13) for biorthogonal modulation, it is necessary to correlate the received composite signal across the plurality of groups with L possible orthogonal signals in the biorthogonal receiver. Therefore, complexity requirements

5   generally limit the practical value of M to no more than eight (8).

Figure 10 is a block diagram of a biorthogonal modulator 36 for an alternate embodiment when M is four (4), which is the next smallest binary power of two. As shown in Figure 10,

10   there are four signal generators 39 for each group, each generator 39 corresponding to a different one of the four orthogonal signals. The two selection bits 40, control signal multiplexor 41, which has M or four signal inputs. The polarity of the signal determined by signal multiplexor 41 is

15   established by multiplying 42 the resulting signal by either a positive or negative factor of unity, determined by polarity multiplexor 43, which is controlled by polarity bit 44. Regardless of the value of M, there is only one polarity bit in each biorthogonal modulator 36, while the number of

20   selection bits increases logarithmically with M.

Figure 11 is a block diagram of the group demodulator for the Figure 9 biorthogonal demodulation system according to an embodiment of this invention where M=2. The signal generators, correlators 17, and absolute-value functions 57,

62

58 are as in Figure 6. However, comparator 59 in prior art

Figure 6, is replaced with the normalized comparison metric, C

65, in Figure 11 which, according to the invention, is

computed as the ratio:

5
$$C \equiv \frac{|M_1| - |M_0|}{\max(|M_1|, |M_0|)} \qquad (8)$$

Where $|M_1|$ is the absolute value of the correlation sum between

the received signal and orthogonal signal 55, $|M_0|$ is the

absolute value of the correlation sum between the received

10   signal and orthogonal signal 56, and $\max(|M_1|, |M_0|)$ is a

function with two operands which results in the larger of the

operands $|M_1|$ and $|M_0|$. In certain embodiments, the signals

are multiple bit digital sequences and the correlation sums

are determined by digital arithmetic, so that the metric

15   computation in equation (8) is also computed digitally. If

the representation of the received signal requires complex

digital arithmetic (i.e. real and imaginary parts), the

absolute-value functions are instead complex magnitude

functions. The result of equation (8) is quantized to a

20   lesser number of bits by quantizer 68 and propagated as "S"

beyond the biorthogonal group demodulator 78. For proper

operation with this configuration, orthogonal signal 55 in the

demodulator corresponds to signal 31 in the modulator and is

associated with an encoded bit value of one and a positive

metric C. Similarly, orthogonal signal 56 in the demodulator corresponds to signal 32 in the modulator and is associated with an encoded bit value of zero and a negative metric C.

When the statistics of the noise and/or crosscorrelation

5   interference are approximately uncorrelated and Gaussian in distribution, the optimum ECC encoder configuration is to encode the selection message bits in the transmitter system of Figure 9 with a nonsystematic convolutional code. Then the optimum ECC decoder 80 for the selection bits in the receiver

10   system (Figures 11-13) is implemented with maximum-likelihood detection using the soft-decision Viterbi algorithm. For nominal operation of the Viterbi algorithm, the width of the quantized metric 78 is three (3) bits; the minimum width is one bit. Additional bits may be implemented but there is a

15   negligible improvement in performance and the required amount of memory increases, particularly in the deinterleaver subsystem.

The limiters 61 and 62 of prior art Figure 6 are replaced with polarity quantizers 69 and 70 in Figure 11. The optimum

20   bit width of polarity quantizers 69 and 70 depends upon the ECC coding that is applied to the polarity message bits in the transmitter system (Figure 9). When a convolutional code with Viterbi detection is implemented, the effective width of each quantizer 69, 70 is at least three bits for optimum

performance, but only one bit is required. For hard-decision

decoding, only one bit is required for each quantizer, and the

function of 69 and 70 becomes equivalent to limiting (i.e.

one-bit quantization is equivalent to limiting). A key

5   difference between the Figure 11 method and the prior art is

that polarity information as "P0" and "P1" for both of the

correlation sums respectively is propagated beyond the

biorthogonal group demodulator. No determination as to which

of the polarity bit estimates is related to the selection bit

10   estimate is made until after ECC decoding at 85 of the

selection bits according to certain embodiments of this

invention.

The function of metric C 65 in Figure 11 resembles the

function of comparator 59 in Figure 6, but the use of metric

15   65 results in improved performance. The improvement due to

the use of the metric is evident with or without orthogonal

multiplexing. In both cases, the magnitudes of the two

correlation sums are compared in order to determine which of

the sums is larger. The advantage in using normalized

20   comparison metric 65 instead of the prior art comparator is

twofold: metric 65 preserves soft-decision reliability

information for later use in the ECC decoding; and metric 65

normalizes the comparison so that the reliability information

is insensitive to uncompensated amplitude fluctuations in the

received signal. The latter advantage is unique to the use of

metric 65 and biorthogonal modulation.

An advantage of biorthogonal modulation in Figures 9-13

relative to the prior art is that normalized comparison metric

5   65 is insensitive to amplitude fluctuations (hence, its

designation). As the received signal amplitude varies, so do

both of the correlation sums, $|M_1|$ and $|M_0|$, in the numerator

of the equation (8) ratio C. The denominator term in the

ratio C, being the largest correlation sum magnitude, also

10   varies in a manner that is proportional to the amplitude

fluctuation. Therefore, the effect of a multiplicative

variation in gain is common to both the numerator and

denominator terms in C, and the ratio remains approximately

constant. The purpose of the maximum-value function in the

15   denominator of the comparison metric is to cause the resulting

ratio to be restricted to values between minus one (-1) and

positive one (+1), inclusive (i.e. normalized).

Receivers for mobile communication systems (e.g. RF)

include automatic-gain-control (AGC) subsystems, which attempt

20   to minimize the fluctuations in the received signal amplitude.

However, the reaction time of an AGC subsystem is limited,

particularly when there is an abrupt change in signal

amplitude (e.g. amplitude differences greater than 10 decibels

when traversing only a few carrier wavelengths). During the

transition interval, the received signal gain may vary widely

before it stabilizes. When the receiver is in-motion in very

difficult multipath environments, the AGC subsystem may not

converge to a constant amplitude because of the continuous

5   variations in the received signal energy. The purpose of the

reliability information is to improve the performance of the

Viterbi decoding algorithm for convolutional codes (known as

soft-decision detection). The maximum coding gain that can be

obtained by the use of soft-decision detection is three

10   decibels when compared to hard-decision detection, which is

equivalent to limiting. In a receiver system with poor

amplitude control or in severe multipath, there is a loss in

coding effectiveness of one to two decibels from the best-case

gain of three decibels due to the problem of gain instability

15   with antipodal modulation. Thus, the advantage of having the

additional reliability information may be significantly

reduced with antipodal modulation and gain instability.

In contrast to the previous paragraph, the receiver

system (Figures 11-13) of the invention does not exhibit soft-

20   decision coding loss for the selection bits due to gain

uncertainty. This characteristic is the consequence of using

normalized comparison metric 65 and biorthogonal modulation.

Normalization does not compensate for the decrease in the SNR

that could be caused by gain changes which lower the signal

level without affecting the level of the noise similarly. In addition, the polarity bit demodulation is still susceptible to amplitude fluctuations because the determination of the polarity bits in the biorthogonal receiver requires antipodal detection of one of the correlation sums. If the selection bits are correctly decoded, then there is an SNR advantage in the determination of the polarity bits. As the value of the SNR increases, the loss due to gain variation also diminishes, so the effect of gain instability on the polarity bits is less severe than on the selection bits. If the mechanism for the determination of the ratio is too complex to implement in certain embodiments, even with only two or three bits, the normalization (i.e. denominator) is omitted, but the receiver is then more sensitive to gain fluctuations.

The operation of the biorthogonal demodulator can be extended beyond the embodiment in Figure 11 where there are only two orthogonal signals in each biorthogonal group (i.e. M=2). In a general case, there are a plurality of M correlators, absolute-value functions, and quantizers in the demodulator in order to determine the correlation sums for each biorthogonal group. The most significant difference between the M=2 and the general case, M>2, is that normalized comparison metric C 65 is replaced with the maximum-value function. The maximum-value function used when M>2 compares

the M correlation sum magnitudes in order to determine the
largest. The selection bit encoding corresponding to the
largest magnitude sum is demodulated as the selection bit
estimate prior to ECC decoding.

5   In the specific embodiment where M=4, if the four
correlation sum magnitudes, corresponding to the four
orthogonal signals in the biorthogonal group, are labeled as
$|M_i|$ for the indices 1, 2, 3, 4, (i.e. $|M_1|$, $|M_2|$, $|M_3|$, and
$|M_4|$), then the form of the generalized metric 65 is the

10   indicator function CM_i, which replaces the comparison metric C
when M>2. The function CM_i is defined as:

$$CM_i = \begin{cases} 1 & \text{if } |M_i| = \max \left(|M_1|, |M_2|, |M_3|, |M_4| \right) \\ 0 & \text{else} \end{cases} \qquad (9)$$

The indicator function results in the binary value one if and

15   only if the index corresponds to the maximum correlation sum
magnitude. The function is evaluated for all indices. The
index corresponding to an indicator value of one is used
together with a table look-up to determine the encoded value
for the selection bits (e.g. two-bit values 00 for index 1,

20   bit values 01 for index 2, bit values 10 for index 3, and bit
values 11 for index 4). A disadvantage of this function is
that it does not preserve soft-decision reliability
information; it only determines which of the orthogonal

signals in the group was most likely to have been sent. If

the maximum correlation sum magnitude in equation (9) is

labeled as $|M|$ (i.e. $|M| = max(|M_i|)$), a measure of the

reliability of the decision can be associated with the

5   function calculated in equation (9) by computing the

difference between $|M|$ and the next largest correlation sum

magnitude and then normalizing the difference by $|M|$. The

normalized reliability estimate is defined as:

$$R_M \equiv \frac{|M| - max(|M_1|, |M_2|, |M_3|, |M_4|) \neq |M|}{|M|} \qquad (10)$$

10

R_M is non-negative. As the value of R_M increases away from

zero, towards positive one $(+1)$, the reliability of the

decision is found to increase. A R_M value of zero indicates

15   that there is an ambiguity in the determining the largest

correlation sum. R_M is quantized to a lesser number of bits

(typically two or three) to limit implementation complexity.

According to certain embodiments of this invention, in

biorthogonal demodulator 78 shown in Figure 11, both of the

20   correlation sums, which correspond to the crosscorrelation

between the received signal and the two orthogonal signals in

the biorthogonal group when M=2, are propagated after

quantization. The result of the normalized comparison metric

65 is the estimate of the encoded selection bit. However,

70

unlike the prior art receiver of Figure 6, biorthogonal

demodulator 78 does not determine which of the two polarity

bit estimates is relevant. Therefore, the demodulation of the

polarity bits is incomplete.

5   Figures 12 and 13 are block diagrams that illustrate the

subsystems in the receiver system, beyond each biorthogonal

demodulator 78. With reference to Figure 12, the RF-tuning

12, A/D data-conversion 13, synchronization 14 and 15, and

equalization 16 subsystems are similar to those in the prior

10   art antipodal receiver system (Figure 2). In addition,

descrambling 76 subsystem is not substantially different from

the prior art antipodal receiver system. The parallel-to-

serial converter 77 is still required, but its operation is

different from the prior art antipodal system. Each group of

15   biorthogonal signals in the plurality with orthogonal

multiplexing has a corresponding biorthogonal demodulator 78,

one of which is shown in Figure 11, and has already been

described. The number of demodulators 78 required or used

may, of course, be substantially greater than the two shown in

20   Figure 12. Deinterleaver 79 and error correction decoder 80

are unrelated to the prior art antipodal receiver system.

The plurality of biorthogonal group demodulators 78 in

Figure 12, generate sequences of bits (S, P0, P1) which

correspond to the quantized normalized comparison metric sums

and quantized correlation sums. According to equations (6) and (7), for the specific embodiment of N orthogonal signals with two orthogonal signals in each biorthogonal group (i.e M=2), N/2 metric sums and N correlation sums are propagated

5   beyond each demodulator 78. The bit sequences are arranged in a serial, sequential manner by the parallel-to-serial converter 77.

With reference to Figure 13, each element in the resulting sequence consists of one metric sum 81 and two

10   correlation sums 82 and 83, each of which is implemented with a plurality of bits. Each element is propagated to symbol deinterleaver 79, which reverses the shuffling implemented in the corresponding symbol interleaver 37 of the biorthogonal transmitter system in Figure 9.

15   A specific internal structure is provided for deinterleaver 79. The requirement for a symbol interleaver in the transmitter system of Figure 9 in order to preserve the relationship between the polarity bits and selection bits was previously described. In the Figure 11-13 receiver system,

20   the relationship between the estimated selection and polarity bits must also be preserved through the deinterleaver 79 shuffling. Since the determination of which of the correlation sums is relevant is not made in each biorthogonal demodulator 78, both correlation sums (i.e. polarity bit

estimates) are related to the selection bit estimate.

Therefore, the minimum width of the symbol deinterleaver for

the comparison metric together with the polarity estimates for

the biorthogonal system with M=2 is three (3) bits. The

5   optimum width is larger if reliability information for soft-

decision decoding is required. The optimum width for the

system with convolutional error coding applied to both the

selection and polarity bits with soft-decision decoding is

nine (9) bits. In some circumstances, where the SNR is

10   relatively high (e.g. greater than 15 decibels) or where the

amount of memory available for the deinterleaving is

insufficient to accommodate the extra bits or where hard-

decision block error coding is applied to the polarity bits,

the correlation sums (i.e. polarity bit estimates) can be

15   quantized to one bit each, which requires an overall

deinterleaver symbol size of five (5) bits. When the method

is extended beyond the receiver system with M=2, the symbol

size of the deinterleaver is increased because there are, in

general, M correlation sums and an indicator function which

20   corresponds to $\log_2 M$ estimated selection bits, with associated

reliability information, determined by equations (9) and (10),

for each biorthogonal group demodulator. Similarly, the

symbol interleaver 37 in Figure 9 is extended in the general

73

case so that each symbol corresponds to log$_2$M selection bits
and one polarity bit.

In the prior art method for multiplexing orthogonal
signals with antipodal modulation, shown in Figures 1 and 2, a
5   symbol interleaver (and consequently symbol deinterleaver) is
not required because the modulation processes occur subsequent
to the interleaver in the transmitter, and the demodulation
processes precede the deinterleaver in the receiver. The
internal structure of the interleaver and deinterleaver is
10   irrelevant as long as there is a bijection between the
unshuffled and shuffled bits. This also applies to the prior
art method of biorthogonal modulation without multiplexing,
shown in Figure 5. The requirement for the symbol interleaver
and symbol deinterleaver is a consequence of the use of the
15   receiver according to this invention, where the polarity bits
are not entirely determined in each biorthogonal demodulator.
This is evident regardless of the type of ECC (i.e.
convolutional or block coding) applied to the selection and
polarity bits.

20   In the Figure 11-13 receiver system according to certain
embodiments of this invention, the decision as to which of the
polarity bit estimates (P0, P1) is relevant is not determined
until beyond deinterleaver 79, while the estimate of the
selection bit is determined in demodulators 78. If the

74

shuffling of the serialized sequence caused by deinterleaver

79 disrupts the relationship between the selection and

polarity bit estimates, then after deinterleaving, it is

difficult to implement the tracking mechanisms that would be

5   required in order to determine which polarity bit estimates

correspond to a particular selection bit estimate. It has

already been shown in equation (5) that if the selection bit

is incorrectly identified, whether by error or by examination

of the wrong corresponding polarity bit estimate, the error

10   probability of the polarity bit escalates to one-half (1/2).

        The direct coupling between the probability of error for

the selection and polarity bits in the prior art demodulator

of Figure 6 is a significant disadvantage to the use of

biorthogonal modulation. According to the invention, the

15   receiver system of Figures 11-13 effect to diminish the

coupling between the error probabilities. Figure 13 is a

block diagram of deinterleaver 79, polarity bit demodulator,

and error correction decoder 80 subsystems. After symbol

deinterleaving 79, the encoded selection bits are ECC decoded

20   by selection bit ECC decoder 85 in order to determine the

estimated scrambled source message bits which were associated

with the encoded selection bits by the ECC encoder in the

transmitter system. The decoded message bits are then re-

encoded by selection bit ECC re-encoder 86. The

characteristics of ECC re-encoder 86 in the receiver system

and ECC encoder 38 in the transmitter system are identical

with regard to the selection bits. The function of ECC re-

encoder 86 is to generate the encoded selection bit sequence

5   from the decoded selection bit estimate. In certain

embodiments when convolutional coding is applied to the

selection bits, ECC re-encoder 86 is preset to the same

initial state as ECC encoder 38 in the transmitter system

because of the memory effects of the code. The initial or

10   preset state may be the all-zeroes state, for example. The

use of a convolutional code for the selection bits has the

advantage, compared to most block codes, that the

implementation of re-encoder 86 is straightforward and

requires a minimum amount of hardware. Convolutional encoders

15   are implemented with tapped linear shift-feedback registers as

described by A.J. Viterbi [reference: A.J. Viterbi,

"*Convolutional codes and their performance in communication

systems,*" ibid.].

     The re-encoding process 86 generates the encoded

20   selection bit sequence corresponding to the decoded selection

bit estimate. The re-encoded selection bit sequence will have

considerably fewer errors compared to the selection bit

estimate determined in each biorthogonal demodulator 78, prior

to ECC decoding 85, because of the effect of ECC coding gain.

The re-encoded selection bits are used to determine which one
of the correlation sums, after deinterleaving 79, is
propagated by multiplexor 87. Once the determination as to
which of the correlation sums is relevant (P0 or P1) is made
5   by selecting between the correlation sums, the demodulated
polarity bit estimate is ECC decoded by remaining ECC decoder
88.

In one embodiment, which is described below, the decoded
selection bits undergo further ECC decoding 88 together with
10 the demodulated polarity bits. This data path is shown in
Figure 13 as dotted line 89. Otherwise, no further ECC
decoding of the selection bits is performed. After ECC
decoding, the decoded selection and polarity bits are a serial
sequence of estimated source message bits 90 except that they
15 remain scrambled. The sequence is propagated beyond the ECC
decoder subsystem 80 for final descrambling 76, described
previously. If the selection and polarity message bits are of
varying importance, separate descramblers are required.

The error probability for the polarity bits is described
20 by equation (5) for the Figure 6 prior art biorthogonal
receiver. Equation (5) is not relevant to the biorthogonal
receiver system of this invention because it does not take
into consideration the effect of coding gain. According to
certain embodiments of this invention (Figures 9-13), it has

been discovered that the probability of error for the polarity

bits, P^P_b, prior to ECC decoding 88 of the polarity bits is:

$$P^P_b = P^{S,D}_b \cdot \frac{1}{2} + (1 - P^{S,D}_b) \cdot P^{P|S}_b$$

$$(11)$$

5   where the error probability of the selection bit, P^S_b, as in

equation (5), is replaced with the error probability of the

selection bit after ECC decoding 85 and re-encoding 86 $P^{S,D}_b$, in

equation (11). The value of $P^{S,D}_b$ is several orders of

magnitude smaller than P^S_b because of the ECC coding gain

10   except when the error rate is extremely high (around 1×10^{-1}),

where the performance of ECC methods, in general,

deteriorates.

    The probability of error in determining the selection

bits prior to ECC decoding 85 is twice that of the equivalent

15   antipodal system as shown in equation (3). The method of this

invention does not change this characteristic. However, the

error rate of the ECC decoded 85 and subsequently re-encoded

86 selection bit sequence is much less than the error rate of

the prior art antipodal system prior to decoding, provided

20   that a sufficiently low rate (i.e. high redundancy) code is

applied to the selection bits. Thus, certain embodiments of

this invention eliminate the undesirable characteristic of the

prior art method and system of reception for biorthogonal

modulation where, at best, the polarity bit error rate could only approach that of the equivalent antipodal system.

For practical SNR values where the receiver system (Figures 11-13) is expected to properly operate (e.g. greater than about 4 decibels), the re-encoded 86 selection bit probability of error is sufficiently small that it may be ignored (i.e. $P^{s.p}_b < 1 \times 10^{-3}$ implies $1-P^{s.p}_b \approx 1$). By equation (11), the polarity bit error rate, P^p_b prior to its own specific ECC decoding 88, is then approximately equal to the polarity bit conditional probability of error, $P^{p|s}_b$, which was shown in equations (4A) and (4B) to have about a three decibel advantage in SNR compared to the prior art antipodal system.

This invention does not reduce the probability of error for the selection bits prior to ECC decoding 85. However, the SNR advantage in the polarity bit determination can be used to improve the overall error probability by decreasing the code rate for the selection bits, which increases the redundancy and consequently lowers the probability of error after decoding. Again, using the first-error event approximation, the decoded error rate for the polarity bits, $P^{p.p}_b$ is approximately:

$$P^{p.p}_b \approx Q\left(\sqrt{\frac{2 \cdot 2 \cdot E_s \cdot d_{eff}}{N_{bo}}}\right) \tag{12}$$

where d_{eff} is the ECC coding gain for the code applied to the polarity bits. By inspection of equation (12), d_{eff} can be reduced by a factor of up to two (i.e. $2 \cdot d_{eff}/2 = d_{eff}$) and the decoded polarity bit error rate will still be approximately

5 equal to that of the equivalent-throughput antipodal system with the same coding, which was given by equation (2). Therefore, a higher rate code (which will have a smaller d_{eff}), can be applied to the polarity bits without sacrificing the error performance of the polarity bits when compared to the

10 prior art antipodal system.

The overall code rate, R, for the encoded selection and polarity bits together is the sum of the product of the code rates and the number of encoded bits for each code. R is found to be:

15
$$R = \frac{\log_2 M}{1 + \log_2 M} \cdot R_S + \frac{1}{1 + \log_2 M} \cdot R_P \qquad (13)$$

where the selection bit code rate is R_S, and the code rate for the polarity bits is R_P. For an embodiment with two orthogonal signals in each biorthogonal group (M=2), equation (13)

20 simplifies to the arithmetic mean of R_S and R_P. The transmitter and receiver systems are designed so that the overall bit rate accommodates the message throughput when burdened by the ECC overhead. Therefore, the required system throughput is the product of the necessary data message

throughput and the reciprocal of the overall code rate. An

increase in the code rate for the polarity bits means that the

code rate for the selection bits can be decreased without

changing the overall code rate. For a multiplying factor, F

5   (F>1), in the polarity bit code rate, it has been found that

the corresponding change factor, G (G<1), in the selection bit

code rate so that the overall rate is unchanged is:

$$G = \frac{R_P}{R_S \cdot \log_2 M} \cdot (1-F) + 1 \qquad (14)$$

10   For example, for an embodiment with two orthogonal signals in

each biorthogonal group (M=2), if $R_P=R_S=1/2$, and if F=4/3,

which corresponds to a thirty-three percent (33%) increase in

the code rate for the polarity bits, then according to

equation (14), G=2/3. Thus, the code rate for the selection

15   bits could be lowered from rate 1/2 to rate $2/3 \cdot 1/2 = 1/3$. There

is a significant decrease in the decoded error rate as the

code rate is lowered below 1/2, especially when the SNR value

is relatively low (e.g. less than about 10 decibels). The

improvement in error performance, after ECC decoding, brought

20   about by the use of a low rate code for the selection bits

more than compensates for the slightly inferior error rate of

the selection bits in biorthogonal modulation prior to

decoding, when compared to prior art antipodal modulation.

The optimum distribution of the average code rate between
the selection and polarity bit code rates depends upon the
characteristics of the data message that is conveyed from the
transmitter system to the receiver system. In certain

5   embodiments, it is desirable that the decoded error rate of
the message bits is approximately equal for all bits. Thus,
the decoded error rates for the selection and polarity bits
must be approximately equal. This circumstance is typical
when the source message represents arbitrary digital data.

10 For these systems, if the overall code rate is 1/2 (which is a
common value for mobile communication systems), the optimum
selection bit code rate, R_s, is found to be between about 1/3
and 1/4, inclusive. However, in communication systems which
transmit and receive digital data that has been significantly

15 compressed with respect to the original information source
(e.g. source coding), the importance or priority level of the
message bits is not equally distributed among all bits.

The transmission and reception of digital audio and/or
video data by compression standards such as the MPEG

20 specification [reference: ISO/IEC 11172-1/2/3, "*Information
technology - coding of moving pictures and associated audio
for digital storage media at up to about 1.5 Mbit/s,*" Geneva,
Switzerland, pp. 140-142, 1993] is an example of a
communication system application where the bit importance

varies considerably. Bits in data fields associated with
synchronization, table-decoding, and exponent magnitudes known
as scale-factors, are found to be much more important than
those associated with mantissa information, especially the

5   bits in the mantissa of lesser-significance corresponding to
small binary powers. The bit importance is defined by the
subjective evaluation of the resulting impairment in the
reconstruction of the audio and/or video data in the receiver.
Bit errors in the mantissa bits may be unnoticed or cause

10   small audio and/or video artifacts, but bit errors in
synchronization fields may cause catastrophic failure such as
muting or video blanking.

When biorthogonal modulation with orthogonal
multiplexing, according to this invention, is used in a

15   communication system where there is significant
differentiation in bit importance, then the bits of highest
importance are to be associated with the selection bits.
Furthermore, the code rate associated with the encoded
selection bits is further lowered so that, after decoding, the

20   error rate of the selection bits is smaller than the error
rate of the decoded polarity bits. As previously described,
separate scramblers and descramblers are required for the
message bits to be associated with the selection and polarity
bits. If, for example, the overall code rate is 1/2, this is

found to be the case when selection bit code rate is
significantly less than 1/3, typically 1/4. As the code rate
is decreased, the message throughput also decreases because
the redundancy information occupies an increasing number of

5   bits. For example, if R_s is 1/2, there are half as many
selection message bits, after decoding, as there are selection
code bits prior to decoding. However, if R_s is reduced to 1/4,
the message throughput is only one-quarter of the coded
throughput for the selection bits, which means that the

10   majority of the source message bits are conveyed by the
encoded polarity bits, which are protected by much less ECC
redundancy. Codes with rates lower than 1/4, while being very
robust, have the disadvantage of very low throughput and are
only useful for selection bit encoding if there is a large (at

15   least an order of magnitude) differentiation in bit importance
and if there is only a small amount (less than 20%) of high
importance data.

      Various algorithms can be used in the ECC encoding and,
consequently, decoding with the invention. The performance of

20   low rate (less than or equal to 1/2) nonsystematic
convolutional codes with soft-decision decoding is superior to
all known block codes with the same rate when the error
distribution is approximately uncorrelated and Gaussian.
Certain embodiments of this invention use a convolutional code

with an overall code rate of 1/2 for the system, a selection

bit code rate between 1/3 and 1/4, inclusive, and a constraint

length of 7. Optimum convolutional codes with these

characteristics have been tabulated [reference: K.J. Larsen,

5   "Short convolutional codes with maximal free distance for

rates 1/2, 1/3, and 1/4," *IEEE Transactions on Information*

Theory, Vol. 19, No. 3, pp. 371-372, May 1973]. The

corresponding code rate for the polarity bits is 2/3 or 3/4,

respectively, for the selection code rates 1/3 and 1/4. The

10   difference in performance between convolutional codes and the

best known block codes for high rate (more than 1/2) codes is

less evident and is found to depend upon the probable

distribution of the errors. In general, if soft-decision

information is available, the convolutional code will have

15   better performance unless either i) very low decoded error

rates are required, less than $1x10^{-12}$, or ii) if large numbers

of consecutive errors occur (correlated bursts). Although

burst error statistics are common in mobile reception, the

interleaving and deinterleaving processes are very effective

20   at dispersing them so that the RF channel appears uncorrelated

at the ECC decoder. High rate convolutional codes have been

tabulated by Daut and others [reference: D.G. Daut, J.W.

Modestino, and L.D. Wismer, "New short constraint length

convolutional code constructions for selected rational rates,"

IEEE Transactions on Information Theory, Vol. 28, No. 5, pp.

794-800, September 1982].

The use of convolutional codes known as "punctured codes"

is advantageous with the invention because of the simplified

5   implementation. Suitable high rate codes have been tabulated

by L.H.C. Lee and others [reference: L.H.C. Lee, "New rate-

compatible punctured convolutional codes for Viterbi

decoding," *IEEE Transactions on Communications*, Vol. 42, No.

12, pp. 3073-3079, December 1994]. For a constraint length of

10   7, useful punctured polarity bit codes at rates 2/3, 3/4, 5/7,

and others are derived by applying a puncturing matrix to the

mother code generated by the binary polynomials 133 and 171.

The rate 1/3 code for the selection bits is generated with the

additional binary polynomial 145 and the rate 1/4 code is

15   generated with the additional binary polynomials 145 and 127.

If the requirement for a common set of code generating

polynomials (known as rate-compatibility) for both the

selection and polarity bits is not present (which complicates

the implementation), a rate 1/3 code with better performance

20   (i.e. a free distance of 15 instead of 14) is generated by the

binary polynomials 133, 145, and 175 and a rate 1/4 code with

better performance (i.e. a free distance of 20 instead of 19)

is generated by the binary polynomials 135, 147, and 163.

The amount of memory required to implement deinterleaver
79 substantially determines the total amount of memory
required for the receiver implementation. The additional
correlation sums which must be propagated through symbol
5   deinterleaver 79 for soft-decision decoding of both the
selection and polarity bits can increase the deinterleaver
memory requirement by fifty (50) percent compared to an
antipodal system. In some receiver implementations, there may
be insufficient memory to accommodate this increase. A block
10   code for the polarity bits may then be preferable. A Reed-
Solomon block can be used for the polarity bit ECC with only
one-bit quantization (i.e. limiting) for the correlation sums
determined in the receiver. Practical symbol sizes for the
Reed-Solomon block code are typically between six and eight
15   bits, inclusive. For limiting quantization and polarity bit
code rates less than 3/4, the concatenated code formed by
appending a parity bit to each Reed-Solomon code symbol
[reference: C.C. Hsu, I.S. Reed, and T.K. Truong, "Error
correction capabilities of binary mapped Reed-Solomon codes
20   with parity bits appended to all symbols," *IEEE Proceedings -
Communications*, Vol. 141, No. 4, pp. 209-211, August 1994] is
found to have better error performance than the Reed-Solomon
block code alone.

Furthermore, for a selection bit code rate of 1/3 and a
polarity bit block code rate of 2/3, it is advantageous to
construct the Reed-Solomon block code so that it includes the
decoded selection bits in the codeword. This adds further

5   robustness to the selection bits because the block code may be
able to correct the occasional error made in the Viterbi
decoding of the encoded selection bits.

With reference to Figure 13, in this embodiment the
decoded selection bits are propagated 89 to the same ECC

10   decoder 88 as are the polarity bits, which have not yet been
decoded. This construction is defined as "partial-code-
concatenation." In the conventional antipodal system or the
best-case prior art non-multiplexed biorthogonal system with
very high SNR value, the demodulated error rate prior to ECC

15   decoding is approximately the same for all detected bits. The
higher rate block code associated with the polarity bits is
then more likely to fail (i.e. be unable to correct all
errors) than the lower rate code so it is disadvantageous to
include the decoded selection bits, which have been presumably

20   encoded with a lower rate code, in the block code. However,
with the method of this invention, there is a difference in
SNR between the selection and polarity bits. It is
surprisingly found that the high rate code (less than or equal
to about 2/3) is less likely to fail than the rate 1/3 code by

a small amount. Thus, extending the polarity bit codeword to

include the decoded selection bits improves the selection bit

error rate so that the overall decoded message error rate is

approximately equal for all bits.

5   Figure 14 illustrates the hierarchical structure of the

partial-code-concatenation codeword when the Reed-Solomon

symbol size is 6 bits; the code is over the Galois field

GF(64), and the selection bits have rate 1/3 coding. In the

encoding process, the plurality of one hundred two (102)

10   source message bits corresponding to the encoded selection

bits together with the plurality of two hundred four (204)

source message bits corresponding to the encoded polarity bits

are first encoded with the Reed-Solomon block code. Reed-

Solomon codes are systematic and so the redundancy information

15   is generated as a series of extra codeword symbols, which are

appended to the encoded polarity bit sequence. Furthermore,

even parity bits are appended to the Reed-Solomon codeword

symbols which will not undergo further convolutional coding

(i.e. the polarity bits). The encoded Reed-Solomon symbols

20   which correspond to the selection bits and which still

represent the plurality of 102 source message bits are then

further encoded with the convolutional code, as described

previously. The decoding process is the reverse; the

convolutional code is decoded, then the parity bits, and

finally the Reed-Solomon codeword.

Having described the method and system according to

certain embodiments of this invention, Figure 15 is a graph

5   that illustrates the advantage that can be obtained by use of

certain embodiments for receiver SNR values between zero (0)

and twelve (12) decibels, inclusive, when the impairment is

additive white Gaussian noise. The embodiment for Figure 15

of the transmitter and receiver of the invention uses

10   orthogonal multiplexing of biorthogonal groups with two

orthogonal signals in each group (Figure 9) and unequal error

protection. The overall code rate is 1/2, convolutional

coding with soft-decision Viterbi decoding is used for both

the selection bits and polarity bits, and the constraint

15   length is 7. The comparison system uses prior art antipodal

modulation (Figures 1-2) and orthogonal multiplexing with a

code rate of 1/2, uniform error protection, convolutional

coding with soft-decision Viterbi detection, and the

constraint length is 7. Suitable codes have already been

20   described.

Curve 91 illustrates the loss in SNR caused by the

doubling of the error probability in the demodulation of the

selection bits in biorthogonal modulation prior to ECC

decoding compared to antipodal modulation. The abscissa

values are the decibel SNR values, $10 \cdot \log_{10}(E_s/N_{bo})$. The

ordinate values are the effective decibel gain in SNR due to

the use of biorthogonal modulation. The gain is always

negative for curve 91 because biorthogonal modulation causes a

5   SNR loss in the detection of the selection bits prior to ECC

decoding. The loss increases as the SNR decreases, which

diminishes the advantage of the method for very low SNR

values.

The method allows the code rate of the selection bits to

10   be reduced without increasing the error rate of the polarity

bits compared to prior art antipodal modulation. The free

distance of the rate 1/2 code used in the antipodal system is

ten (10). The code rate of the polarity bits in the

biorthogonal system can be increased so that the free distance

15   is as small as about five (5) without causing a decrease in

the performance of the decoded polarity bits when compared to

antipodal modulation as a result of the polarity bit SNR

advantage of certain embodiments of this invention. The

approximate improvement in SNR (i.e. coding gain) due to the

20   increase in distance brought about by the low rate selection

bit ECC is shown as lines 92, 93, and 94, for selection bit

code rates of 1/3, 2/7, and 1/4, respectively. The coding

gain is measured relative to the uniform rate 1/2 code on the

antipodal comparison system. The improvement due to the

method in the selection bit error performance is the

difference 95 between the loss curve 91 and the appropriate

coding gain line. For example, when using a rate 1/4

selection bit code, the polarity bit error rate is

5   approximately equal to that of the equivalent antipodal system

because the distance of the corresponding rate 3/4 code for

the polarity bits is 5, which is half that of that of the

comparison system with a distance of 10. Thus, the entire

amount of the polarity bit SNR advantage of three decibels has

10   been utilized in order to have a very low code rate for the

selection bits. When the SNR value is only 5.5 decibels, the

effective improvement in SNR for the selection bits, shown in

Figure 15, is approximately 1.8 decibels, which is very

significant since the comparison antipodal system already is

15   robust, having one hundred percent (100%) redundancy in the

ECC.

The surprising result is that there is an effective

improvement in SNR, after decoding, even when the impairment

is additive noise. The effects of crosscorrelation

20   interference were not considered. It has already been

described that the use of biorthogonal modulation

substantially reduces the crosscorrelation interference due to

multipath and dispersion because the number of simultaneously

transmitted signals is reduced without affecting the bit rate

92

throughput. Thus, the benefits of this invention are twofold:
the crosscorrelation interference is reduced by between
approximately three and six decibels in certain embodiments,
and the fundamental error performance, after decoding, is

5   improved for most SNR values. As a result, the use of this
invention is found to dramatically improve the performance of
a multiplexed orthogonal communication system in multipath.

The method according to certain embodiments (Figures 9-
14) of this invention is applicable to a multiplexed

10 transmitter and receiver system with at least two orthogonal
signals, which includes OFDM modulation and synchronous Time-
Division-Multiplex (TDM) modulation. However, the most
significant performance gains are accomplished in systems
where crosscorrelation interference is the primary impediment

15 towards improved system performance, as is the case with
wideband, spread spectrum orthogonal or approximately
orthogonal signals. The method is found to work with PN
codes, Gold codes, Kasami codes, Bent codes and other
spreading codes described previously. The method according to

20 certain embodiments is applicable to all known orthogonal
basis signal representations, which can be normalized to have
unit magnitude (known as orthonormal) including those derived
by eigenvector solutions of matrix equations, which are
inherently orthonormal, and by the Gram-Schmidt

orthogonalization of a set of non-orthogonal basis signals

[reference: G.R. Cooper, et al., ibid., pp. 206-209]. Band-

limited orthogonal signals suitable for use with the invention

may also be determined by methods described by R.W. Chang in

5   "Synthesis of band-limited orthogonal signals for multichannel

data transmission," *The Bell System Technical Journal*, Vol.

45, pp. 1775-1796, December 1966, and in U.S. Patent Nos.

4,403,331 and 5,081,645. The signals determined by the

methods are implemented in the specific embodiments of the

10   signal generators 31, 32, 39, 55, and 56.

The system and method according to different embodiments

of this invention (Figures 9-14) is applicable to a

communication system whose transmitter simultaneously

transmits a plurality of orthogonal signals which is a

15   positive power of two (2). A system with two orthogonal

signals, being simultaneously transmitted with antipodal

modulation, where the two signals correspond to quadrature

phases of the RF carrier frequency, is known as Quadrature

Amplitude Modulation (QAM) or Quaternary Phase-Shifting Keying

20   (QPSK) or a variation thereof including Differential

Quaternary Phase-Shift Keying (DQPSK), and Offset Quaternary

Phase-Shift Keying (OQPSK). The QPSK modulator for such a

system is equivalent to that shown in Figure 4 for the

specific embodiment where the signal generators 6 correspond

to the in-phase (I) and quadrature (Q) signals, which are out-
of-phase with respect to each other by about ninety (90)
angular degrees. In the absence of impairment, quadrature
signals are orthogonal. Multipath and other frequency-

5   selective dispersive effects cause an increase in the
crosscorrelation interference between the two signals (known
as crosstalk), which degrades the performance of the QPSK
system. Thus, the method and system according to certain
embodiments of this invention is advantageous in QPSK systems

10   and variations thereof because of the reduction in
crosscorrelation interference and the performance improvement,
after decoding, in random noise. In embodiments of the
invention as a replacement for QPSK systems, the QPSK
modulator corresponding to Figure 4 is replaced with the

15   biorthogonal modulator with M=2 where either the I signal or
the Q signal is transmitted, but not both, together with
polarity modulation of the transmitted signal, without
affecting the bit rate throughput. Similarly, the QPSK
receiver is replaced with a plurality of biorthogonal

20   demodulators according to Figures 11-13.

A transmitter with a QPSK modulator is further
multiplexed by the simultaneous transmission of additional
pairs of quadrature signals, all of the transmitted signals
are pairwise orthogonal. Typically, the quadriphase signal

pairs are distinguished from one another by frequency division multiplexing such as FDM or OFDM or with time-division multiplexing (TDM). The plurality of QPSK groups, each having simultaneous transmission of the I signal and the Q signal, is

5   replaced with a plurality of biorthogonal signal groups of equal number, where either the I or Q signal is transmitted for each group, along with polarity modulation.

Once given the above disclosure, therefore, various other modifications, features or improvements will become apparent

10 to the skilled artisan. Such other features, modifications, and improvements are thus considered a part of this invention, the scope of which is to be determined by the following claims:

96

I CLAIM:

1   1.   A transmitter for simultaneously transmitting a

2   plurality of substantially orthogonal signals for reception by

3   at least one receiver, the transmitter comprising:

4   first and second biorthogonal modulators, each of

5   said biorthogonal modulators including a multiplexor for

6   outputting one of a possible plurality M of substantially

7   orthogonal signals at a particular polarity; and

8   means for forming a composite signal from the

9   outputs of said first and second biorthogonal modulators so

10   that a plurality of substantially orthogonal biorthogonally

11   modulated signals are simultaneously transmitted as the

12   composite signal.

1   2.   The transmitter of claim 1, further comprising an

2   unequal error protection encoder for error encoding selection

3   bits with additional redundancy compared to polarity bits.

1   3.   The transmitter of claim 2, further comprising a

2   symbol interleaver located between said encoder and said first

3   and second biorthogonal modulators; and

4   wherein said plurality of substantially orthogonal

5   signals are spread spectrum signals.

1   4.   A method of simultaneously transmitting a plurality

2 of substantially orthogonal signals using a single

3 transmitter, the method comprising the steps of:

4   using simultaneous multiplexing of biorthogonal

5 modulation to provide a plurality of substantially orthogonal

6 signals which are biorthogonally modulated; and

7   combining and simultaneously transmitting the

8 plurality of biorthogonally modulated substantially orthogonal

9 signals so as to reduce crosscorrelation interference.

1   5.   The method of claim 4, further comprising the step

2 of applying unequal error protection to the signals which are

3 transmitted.

1   6.   The method of claim 4, wherein the substantially

2 orthogonal signals are one of orthogonal and approximately

3 orthogonal.

1   7.   The method of claim 6, further comprising the step

2 of biorthogonally modulating from a group of M substantially

3 orthogonal signals where M≥2; and

4   wherein the plurality of substantially orthogonal

5 signals are spread spectrum signals.

1   8.   A receiver for receiving and demodulating a

2   biorthogonally modulated signal including selection bits and

3   polarity bits, the receiver comprising:

4   a biorthogonal demodulator for estimating selection

5   bits;

6   a selection bit decoder for decoding said estimated

7   selection bits in accordance with an error correction code;

8   a selection bit re-encoder for generating a re-

9   encoded selection bit sequence, using said code, from the

10   decoded selection bit estimates so that the polarity bits can

11   be estimated;

12   a polarity bit demodulator for estimating the

13   polarity bits using the re-encoded selection bits; and

14   a polarity bit decoder for decoding the polarity bit

15   estimates.

1   9.   The receiver of claim 8, further comprising a symbol

2   deinterleaver located between said biorthogonal demodulator

3   and said selection bit decoder.

1   10.   A method of receiving a biorthogonally modulated

2   signal including a selection bit and a polarity bit, the

3   method comprising the steps of:

4   estimating a selection bit;

5   decoding the selection bit estimate according to an

6   error correction code;

7   re-encoding the decoded selection bit estimate using

8   said code; and

9   estimating the polarity bit of the received

10   biorthogonally modulated signal using the re-encoded selection

11   bit.

1   11.   The method of claim 10, further comprising the steps

2   of:

3   determining correlation sums, and performing a

4   normalized comparison metric on said correlation sums, the

5   metric C being defined as:

6
7    $$C = \frac{|M_1| - |M_0|}{max(|M_1|, |M_0|)}$$

8   where $|M_1|$ is the absolute value of the correlation sum between

9   the received signal and a first orthogonal signal, $|M_0|$ is the

10   absolute value of the correlation sum between the received

11   signal and a second orthogonal signal, and $max(|M_1|, |M_0|)$ is a

12   function with two operands which results in the larger of

13   operands $|M_1|$ and $|M_0|$; and wherein the received signal is a

14   spread spectrum signal.

1   12.   A method of applying unequal error protection to a

2   signal for biorthogonal modulation, the method of comprising

3   the steps of:

4   applying unequal error protection to a signal to be

5   biorthogonally modulated by increasing the code rate for the

6   polarity bit relative to the selection bit so that the

7   selection bit to be transmitted is error encoded with

8   additional redundancy relative to the polarity bit; and

9   biorthogonally modulating the error encoded signal

10   to be transmitted.

1   13.   An error correction encoding process for

2   biorthogonal modulation comprising the steps of:

3   error encoding data message bits to be associated

4   with biorthogonal selection and polarity bits with redundancy

5   information;

6   further error encoding the selection bits so that

7   the selection bits have additional redundancy compared to the

8   polarity bits; and

9   biorthogonally modulating and transmitting the error

10   encoded message data bits, the transmitted signal having

11   unequal error protection in that the selection bits have more

12   redundancy than the polarity bits.

1   14.   The method of claim 13, wherein said further error

2   encoding of said selection bits is with a convolutional code

3   and said polarity bits are error encoded with a systematic

4   block code.

1   15.   A receiver for receiving a biorthogonally modulated

2   signal comprising:

3   means for determining correlation sums of the

4   received biorthogonally modulated signal; and

5   a normalized comparison metric for incorporating

6   reliability information together with biorthogonal

7   demodulation in order to mitigate the effects of gain

8   instability on the determination of selection bits.

1   16.   A method of receiving a multiplexed composite signal

2   including a plurality of orthogonal or approximately

3   orthogonal biorthogonally modulated signals, each of the

4   signals in the composite originating from a distinct

5   biorthogonally modulated group, the method comprising the

6   steps of:

7   providing a plurality of biorthogonal demodulators;

8   and

9   demodulating the received multiplexed biorthogonally

10 modulated composite signal using said plurality of

11 demodulators so that each of said demodulators demodulates a

12 received biorthogonally modulated signal corresponding to one

13 of said groups.

1   17.   The method of claim 16, further comprising the steps

2   of estimating selection bits prior to estimating polarity bits

3   of the received signals in the composite, and using the

4   estimated selection bit of a received signal to estimate the

5   polarity bit of that signal.

1   18.   A receiver for receiving a biorthogonally modulated

2   signal including selection bits and polarity bits, the

3   receiver comprising:

4   at least a pair of signal generators for generating

5   orthogonal signals;

6   a pair of correlators corresponding to said pair of

7   signal generators, said correlators for processing the

8   received biorthogonally modulated signal and generating

9   correlation sums using the signals generated by the

10 corresponding signal generators; and

11   normalized comparison metric means for receiving

12 magnitudes of said correlation sums and normalizing a

13 comparison between the received magnitudes so that reliability

14   information is substantially insensitive to uncompensated

15   amplitude fluctuations in the received signal.

1   19.   The receiver of claim 18, wherein said normalized

2   metric means computes ratio C as:

3
4    $$C = \frac{|M_1| - |M_0|}{\max(|M_1|, |M_0|)}$$

5   where M_1 is the magnitude of the correlation sum between the

6   received signal and one of the generated orthogonal signals

7   and M_0 is the magnitude of the correlation sum between the

8   received signal and the other generated orthogonal signal.

1   20.   The receiver of claim 18, further comprising two

2   additional signal generators and corresponding correlators so

3   that M=4, and wherein said metric means computes function CM_i

4   as:

5
6    $$CM_i = \begin{cases} 1 & \text{if } |M_i| = \max(|M_1|, |M_2|, |M_3|, |M_4|) \\ 0 & \text{otherwise} \end{cases}$$

7   and the normalized reliability estimate as:

8
9
10   $$R_M \equiv \frac{|M| - \max(|M_1|, |M_2|, |M_3|, |M_4|)}{\neq |M|}}{|M|}.$$
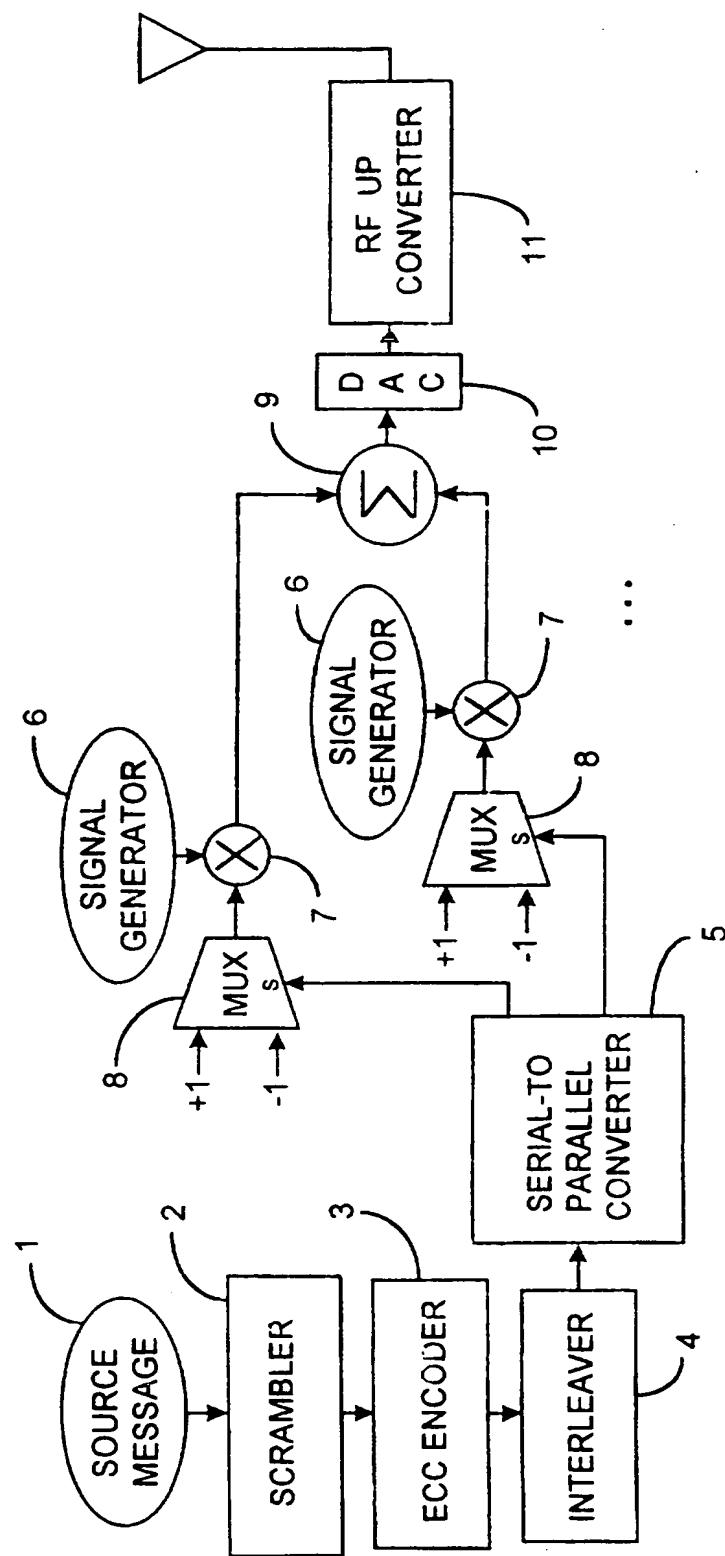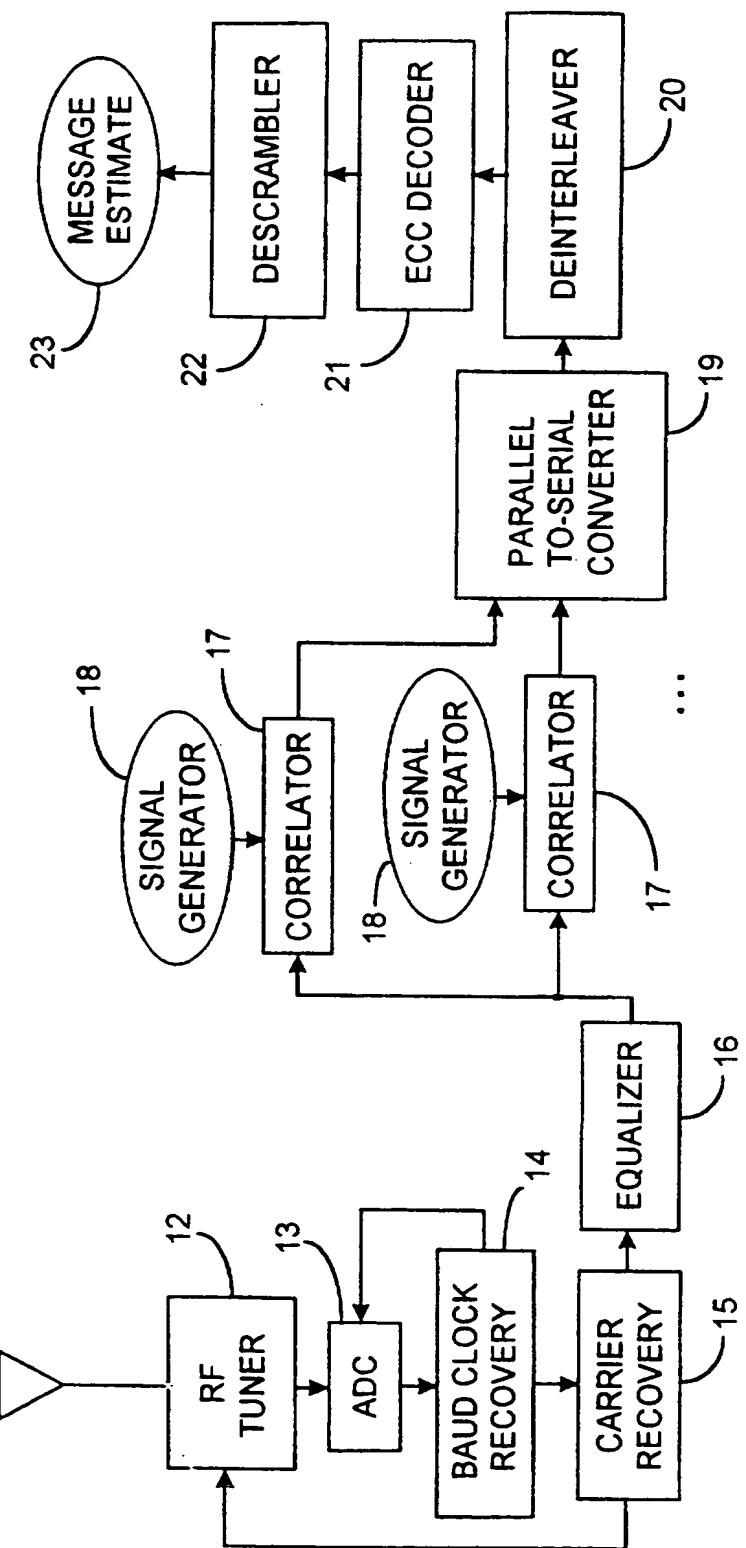
FIG. 1 (PRIOR ART)

FIG. 2 (PRIOR ART)
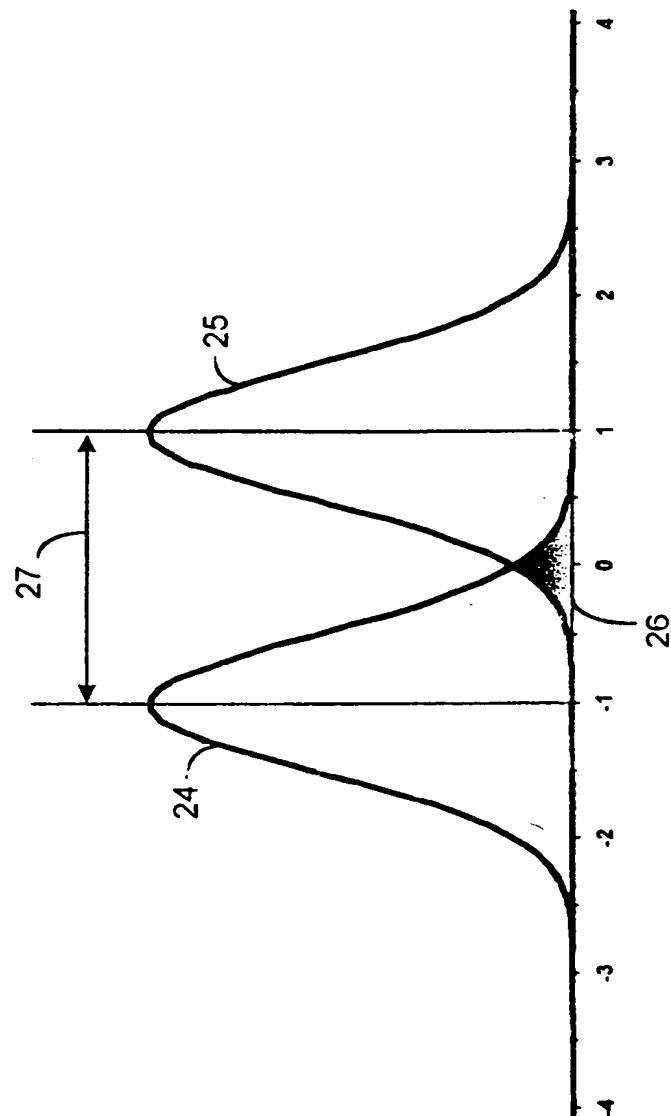
FIG. 3 (PRIOR ART)
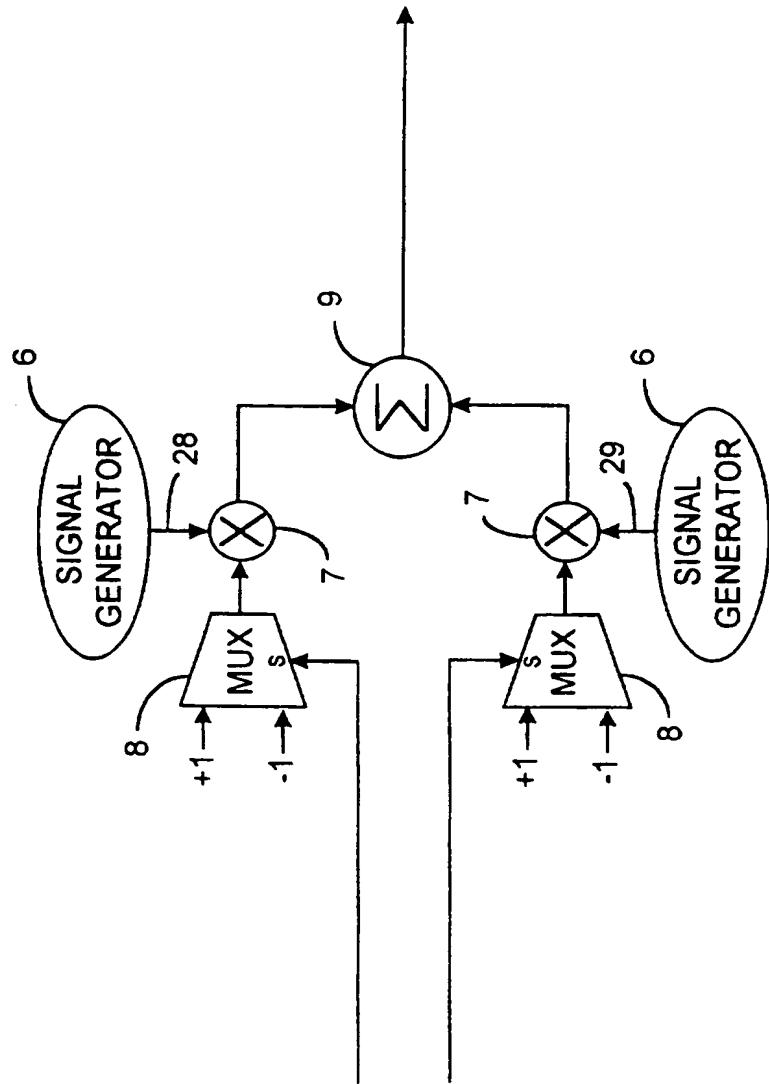
FIG. 4 (PRIOR ART)
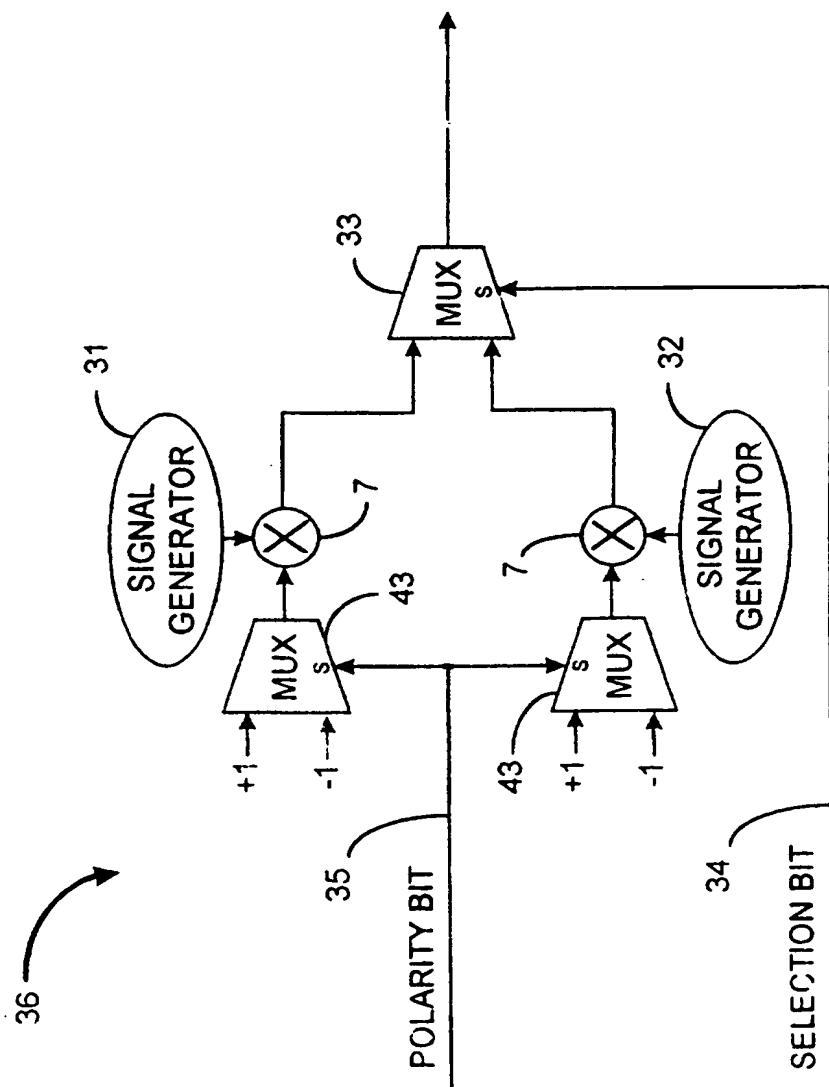
FIG. 5 (PRIOR ART)
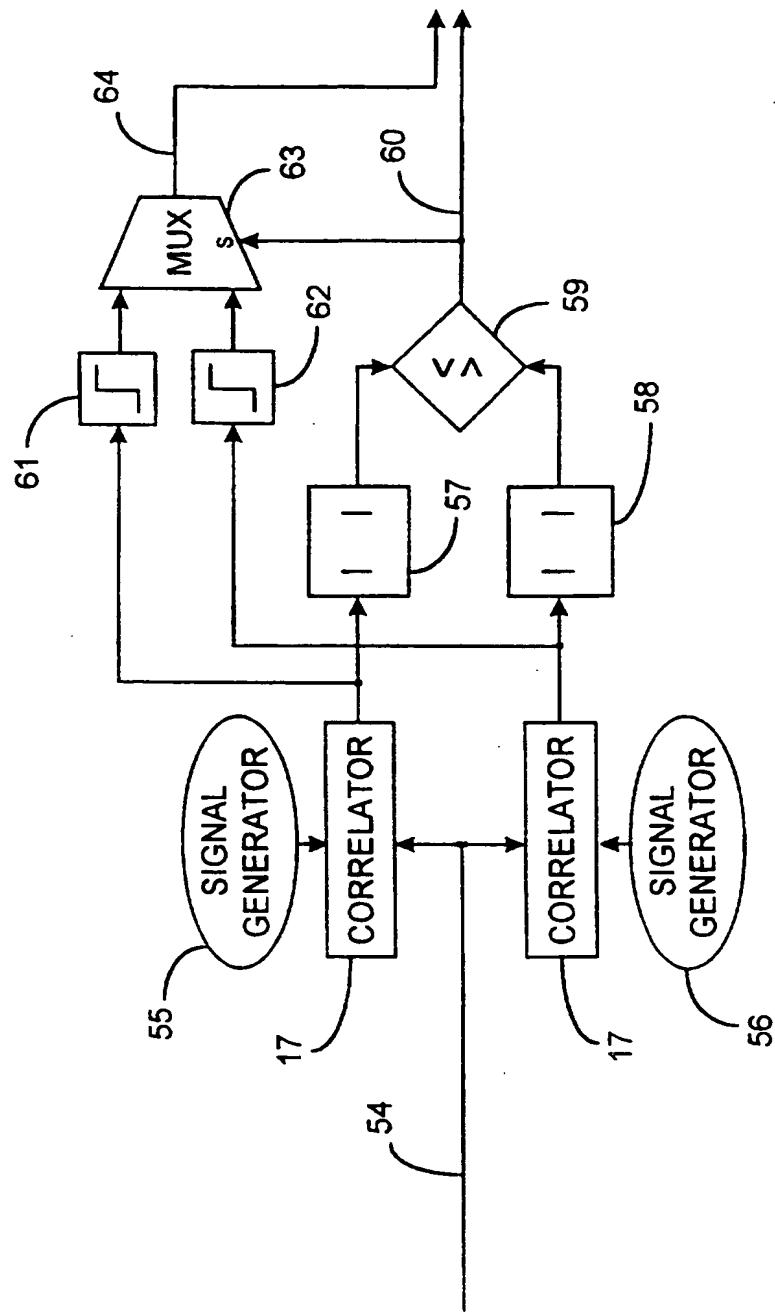
FIG. 6 (PRIOR ART)
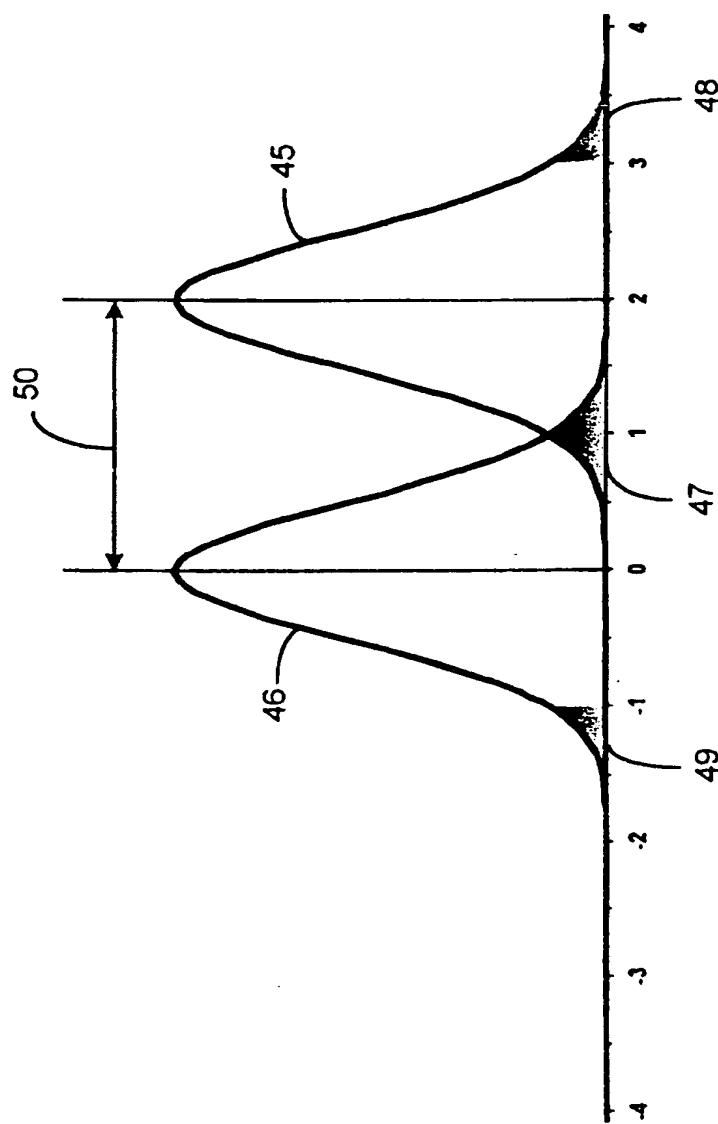
FIG. 7 (PRIOR ART)
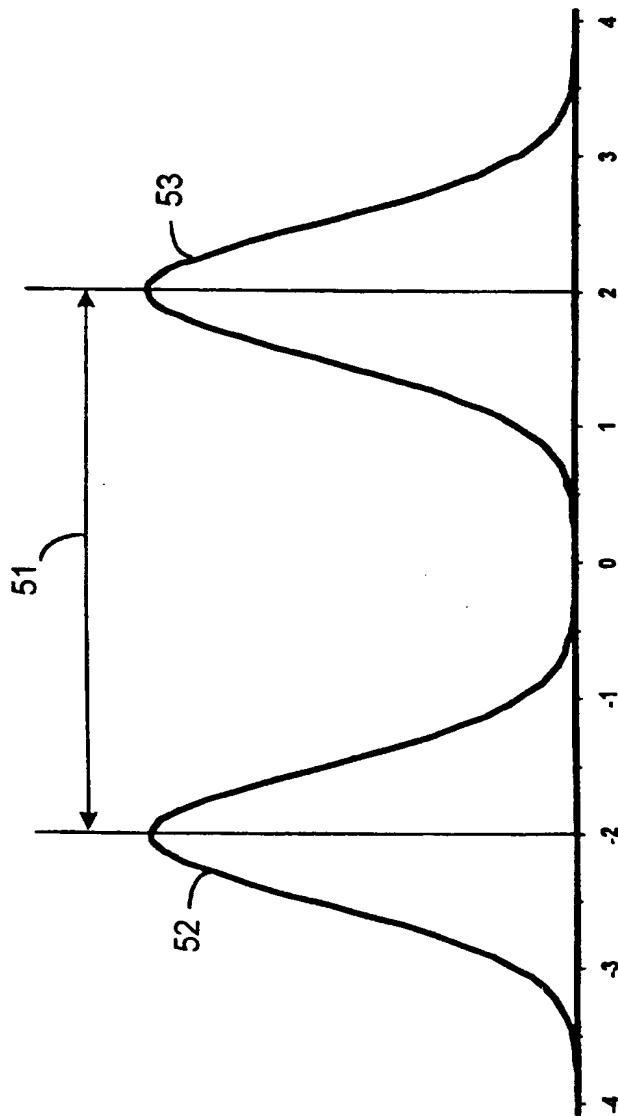
FIG. 8 (PRIOR ART)
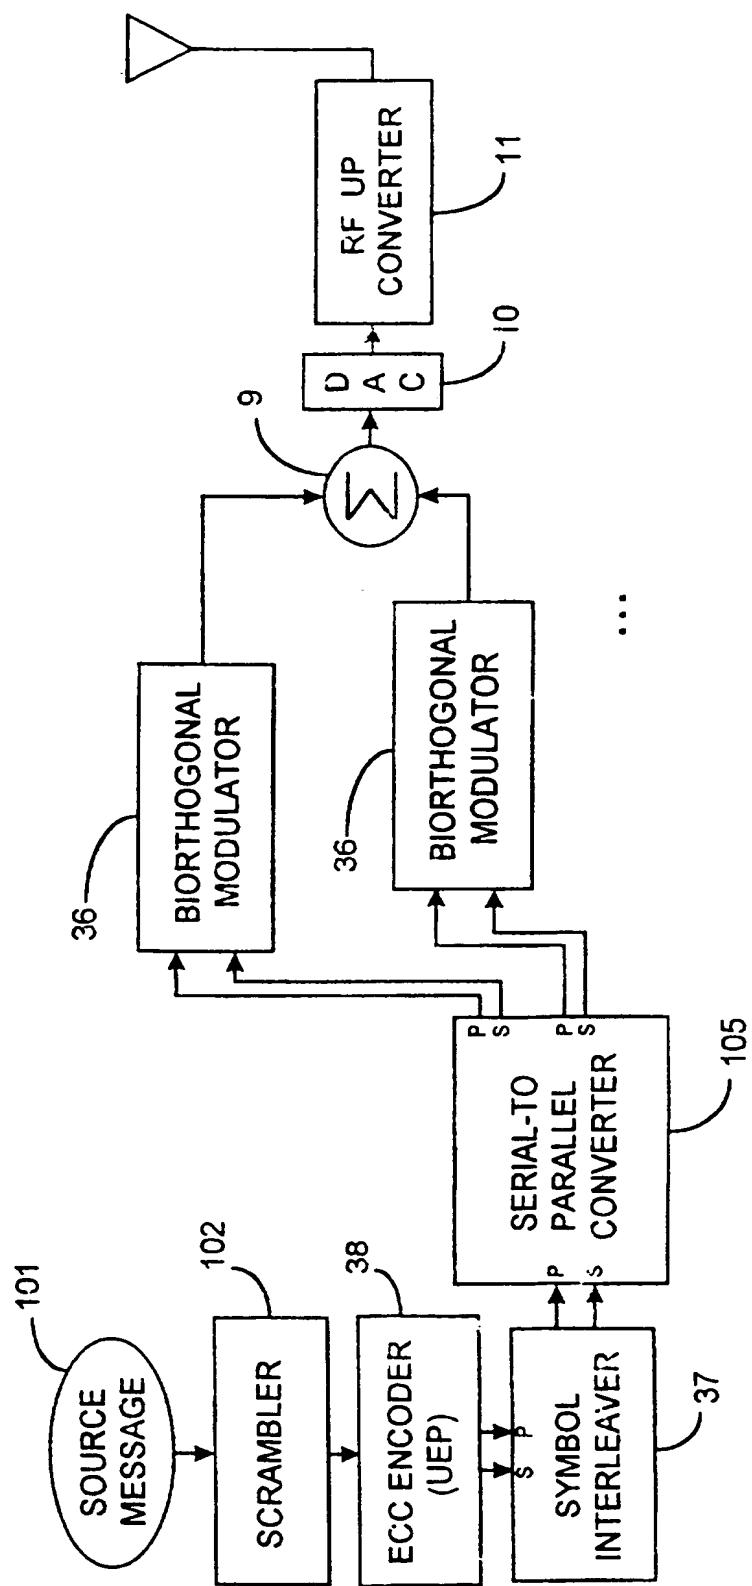
FIG. 9
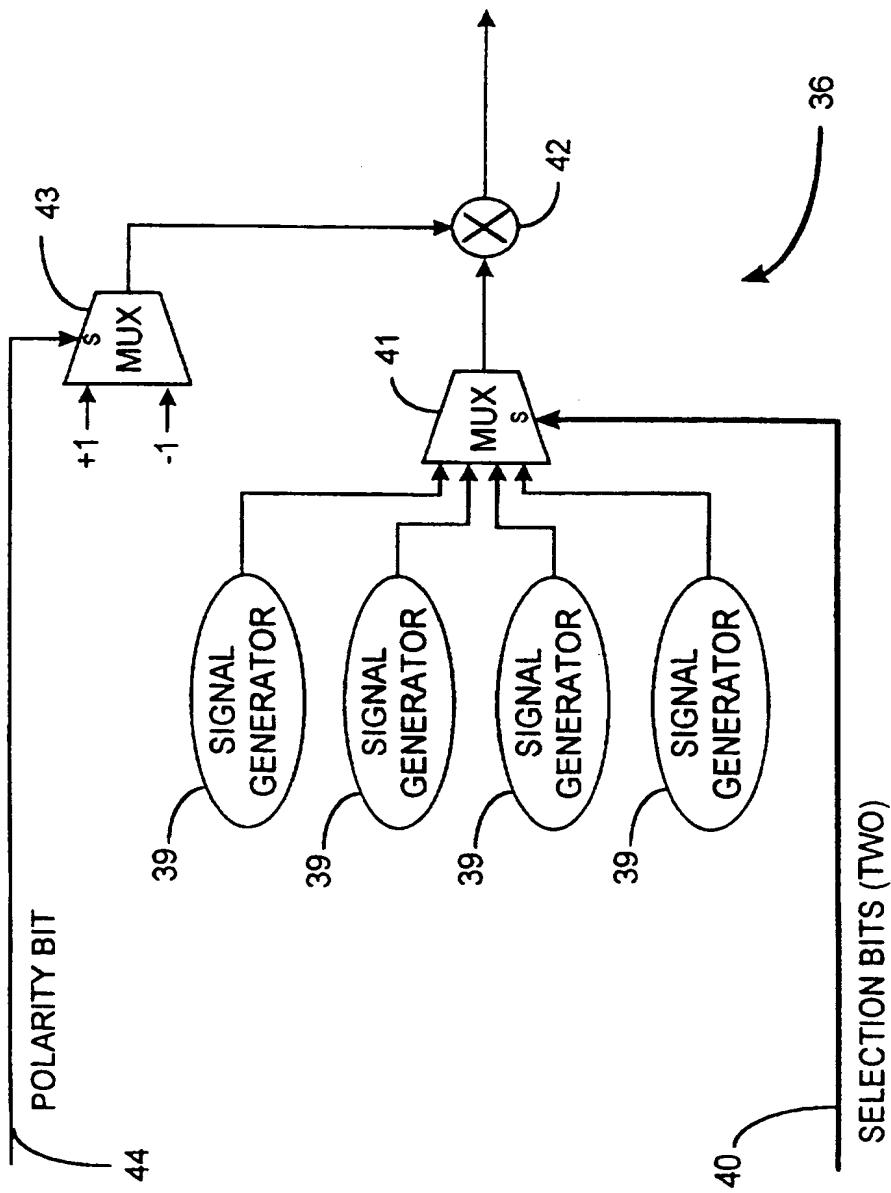
FIG. 10
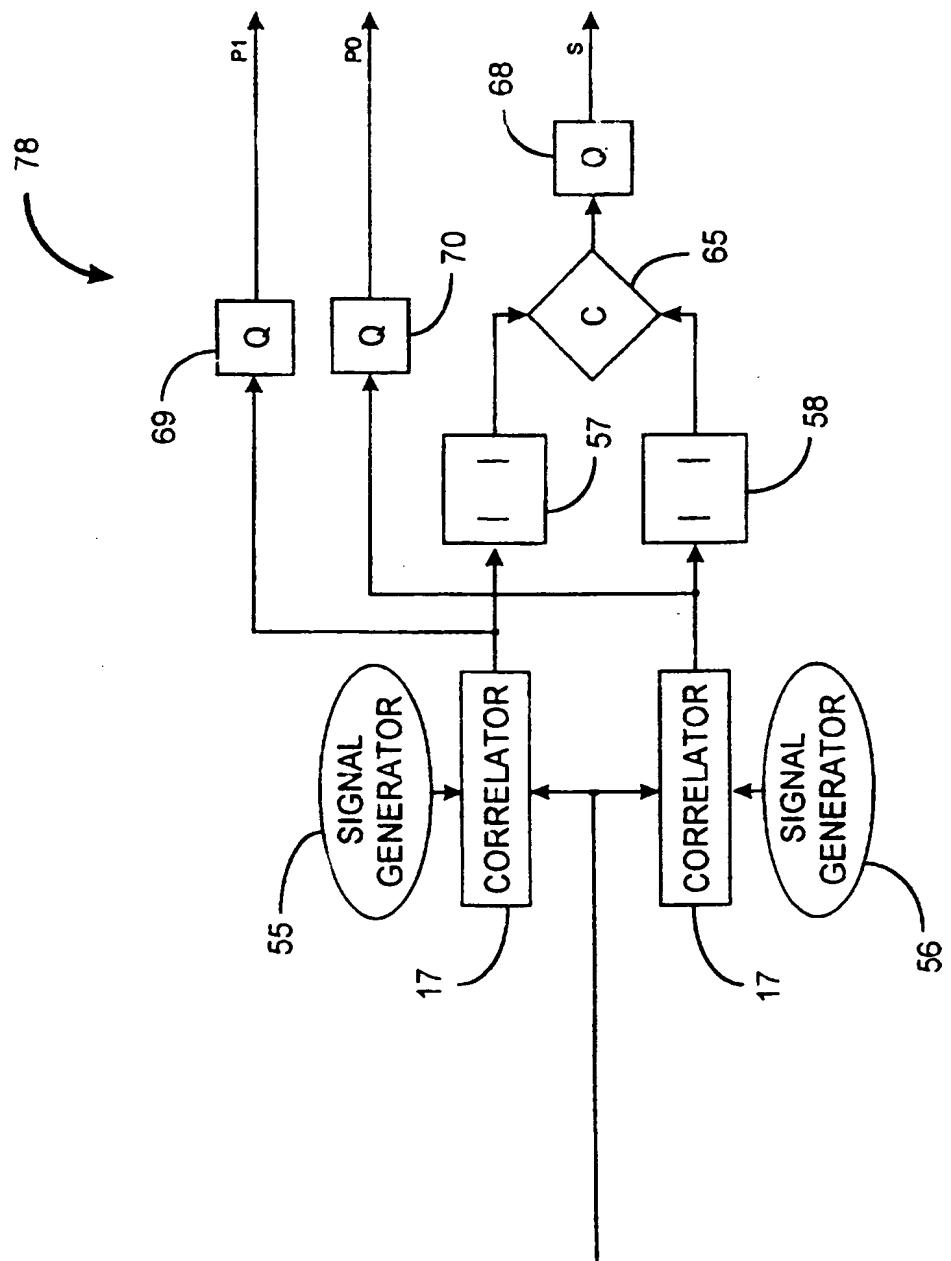
FIG. 11
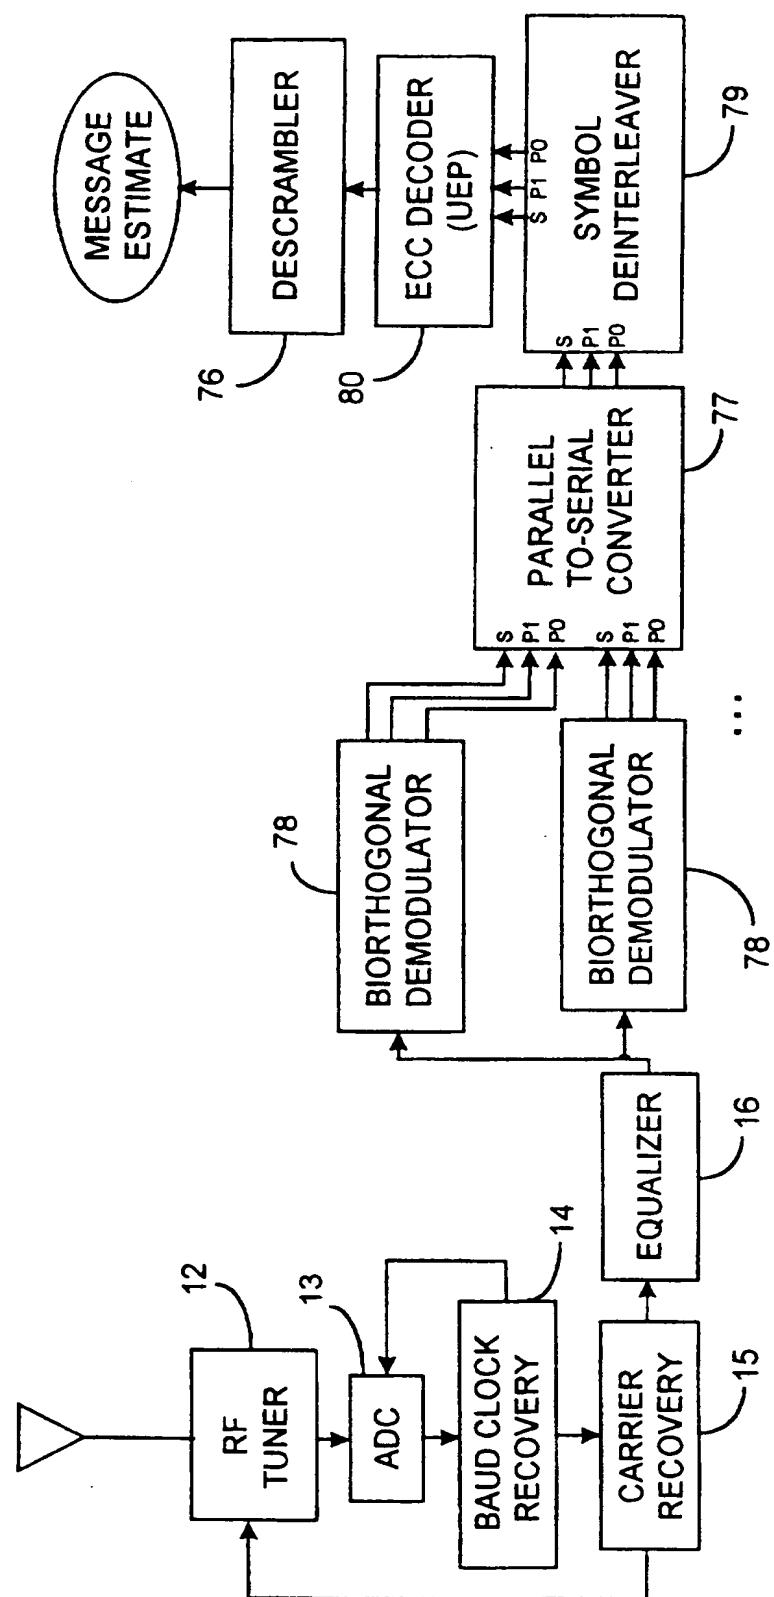
FIG. 12
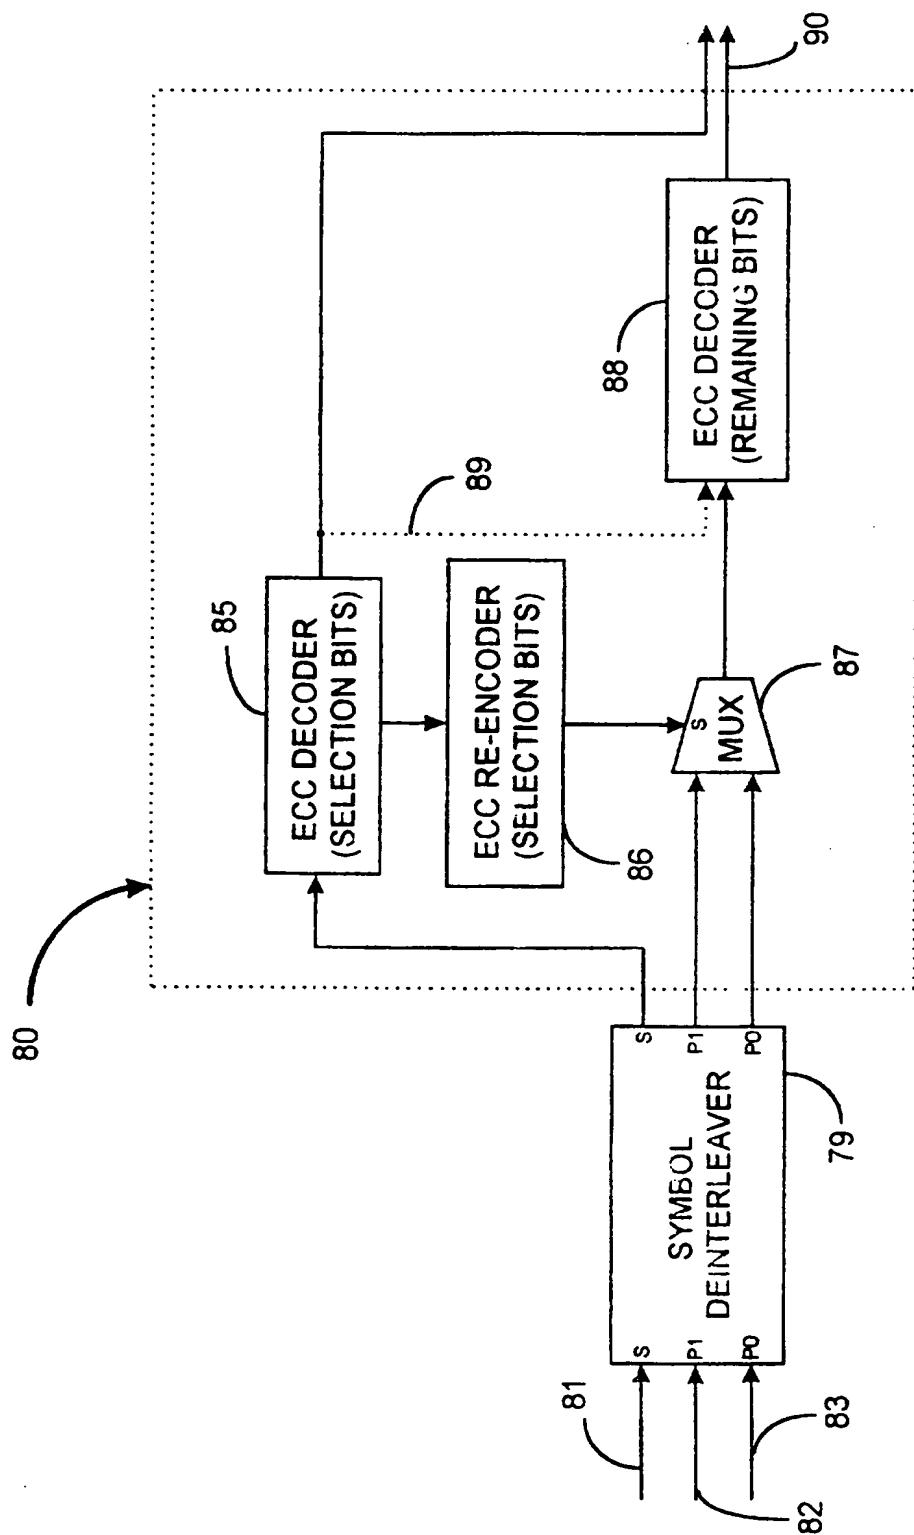
FIG. 13
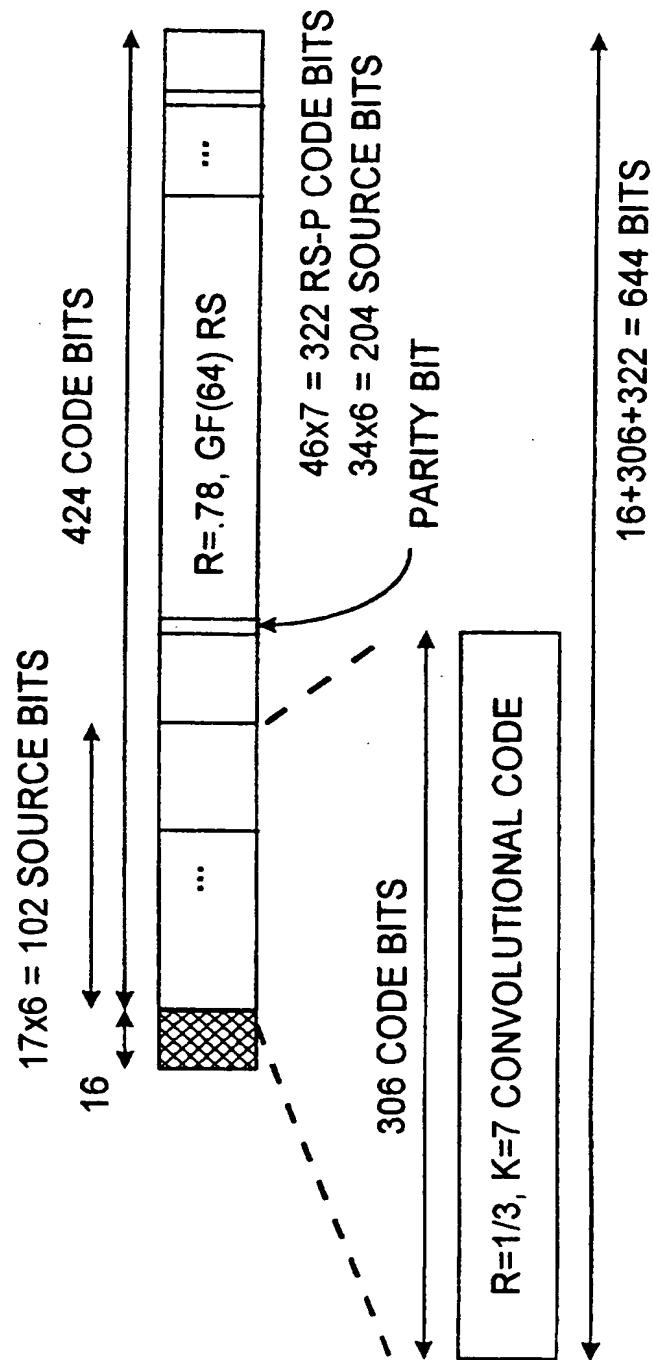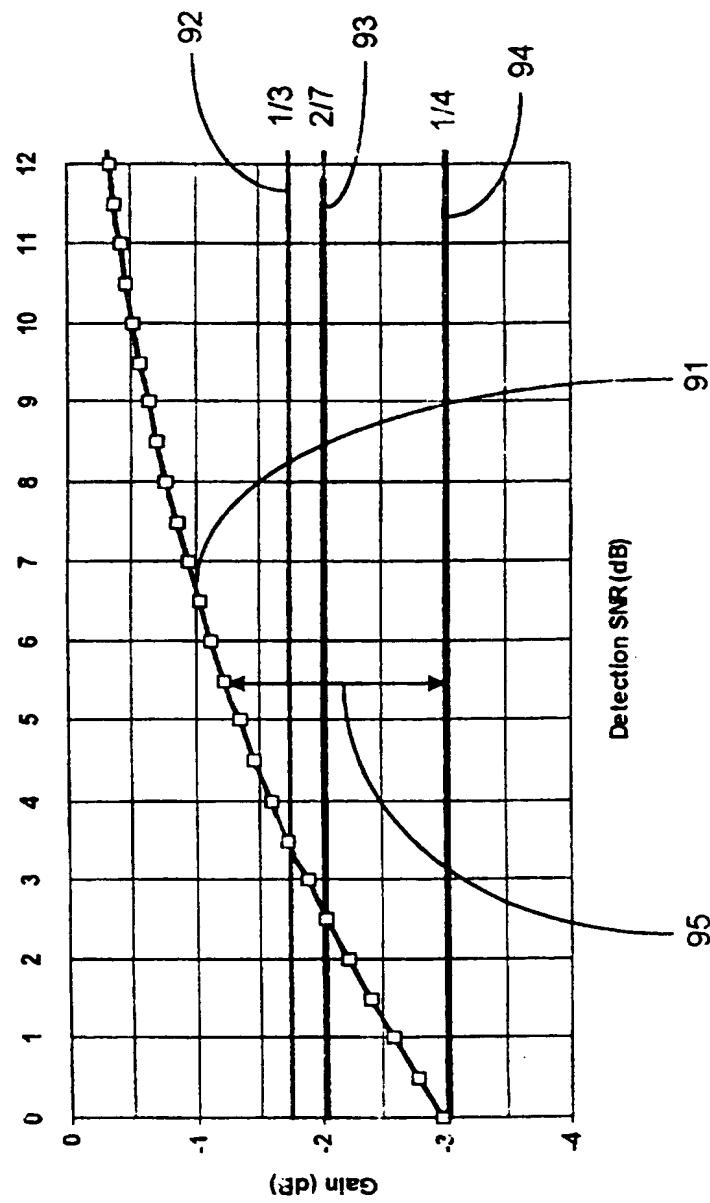
424 CODE BITS

17x6 = 102 SOURCE BITS

16

R=.78, GF(64) RS

46x7 = 322 RS-P CODE BITS

34x6 = 204 SOURCE BITS

PARITY BIT

306 CODE BITS

16+306+322 = 644 BITS

R=1/3, K=7 CONVOLUTIONAL CODE

FIG. 14

FIG. 15

A. CLASSIFICATION OF SUBJECT MATTER

IPC(6) :H04L 27/04; H04B 15/00

US CL : 375/295, 200; 370/203, 206, 208

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 375/295, 200, 210; 370/203, 206, 208

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

Please See Extra Sheet.

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 4,730,344 A (SAHA) 08 March 1988, see col. 4, line 41 - col. 5, line 50	1-7
A	WO 95/24773 A (OJANPERA ET AL.) 14 September 1995, see col. 4, line 41 - col. 5, line 50.	1-7

☐ Further documents are listed in the continuation of Box C. ☐ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search	Date of mailing of the international search report
28 JANUARY 1997	11 MAR 1997

Name and mailing address of the ISA/US	Authorized officer
Commissioner of Patents and Trademarks Box PCT Washington, D.C. 20231	TEMESGHEN GHEBRETINSAE
Facsimile No. (703) 305-3230	Telephone No. (703) 305-4777

INTERNATIONAL SEARCH REPORT

Box I   Observations where certain claims were found unsearchable (Continuation of item 1 of first sheet)

This international report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐   Claims Nos.:
        because they relate to subject matter not required to be searched by this Authority, namely:

2. ☐   Claims Nos.:
        because they relate to parts of the international application that do not comply with the prescribed requirements to such
        an extent that no meaningful international search can be carried out, specifically:

3. ☐   Claims Nos.:
        because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box II   Observations where unity of invention is lacking (Continuation of item 2 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

1. ☐   As all required additional search fees were timely paid by the applicant, this international search report covers all searchable
        claims.

2. ☐   As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment
        of any additional fee.

3. ☐   As only some of the required additional search fees were timely paid by the applicant, this international search report covers
        only those claims for which fees were paid, specifically claims Nos.:

4. ☒   No required additional search fees were timely paid by the applicant. Consequently, this international search report is
        restricted to the invention first mentioned in the claims; it is covered by claims Nos.:
        1-7

Remark on Protest   ☐   The additional search fees were accompanied by the applicant's protest.
                         ☐   No protest accompanied the payment of additional search fees.

Form PCT/ISA/210 (continuation of first sheet(1))(July 1992)*

B. FIELDS SEARCHED

Electronic data bases consulted (Name of data base and where practicable terms used):

APS/STN

search terms: biorthogonal modulator and demodulator, polarity bit decoder and demodulator, biorthogonal signals, orthogonal signals, unequal error protection encoder, symbol interleaver.